



LED VILLOGÓ FÉNYJELZŐ/HANGJELZŐ, CS1

C111222005

LED-es akusztikus riasztó, Fehér ház, Vörös, 24 V DC,
CS2

- Független vagy vízszintes rögzítés, költséghatékony fényjelző hangjelzővel
- 86-106 dB tartomány
- Villogó fényjelző 32 tónussal
- IP65




TERMÉKLEÍRÁS

A CS1 egy LED-lámpás villogóval felszerelt gazdaságos kombinált modul. A hangjelzés és a hangszint DIP-kapcsolókkal állítható be, a bel- és kültéri kivitelű készülékek védelme egyaránt IP65 fokozatú. A 32 különböző hangjelzés a legtöbb célra – pl. tűzjelzésre – elegendő.

MŰSZAKI ADATOK



Felszerelés	Vízszintes, Független
Fényforrás	LED
Hangjelzések száma	32 pc
IP-osztály	IP65
Kábelbemenet	Alul
Lencse színe	Vörös
Light type	Narancsszínű LED
Max. hangfrekvencia	2900 Hz
Max. névleges áramerősség	0,041 A
Max. tápfeszültség, AC/DC	35 V
Max. üzemi hőmérséklet	70 °C
Max. zajszint	109 dB
Min. hangfrekvencia	440 Hz
Min. névleges áramerősség	0,014 A

Min. tápfeszültség, AC/DC	18 V
Min. üzemi hőmérséklet	-20 °C
Min. zajszint	88 dB
Színes ház	Fehér
Tápfeszültség	24 V
Tömeg	258 g
Villanás frekvencia	1 Hz
Zajszabályozás	Igen

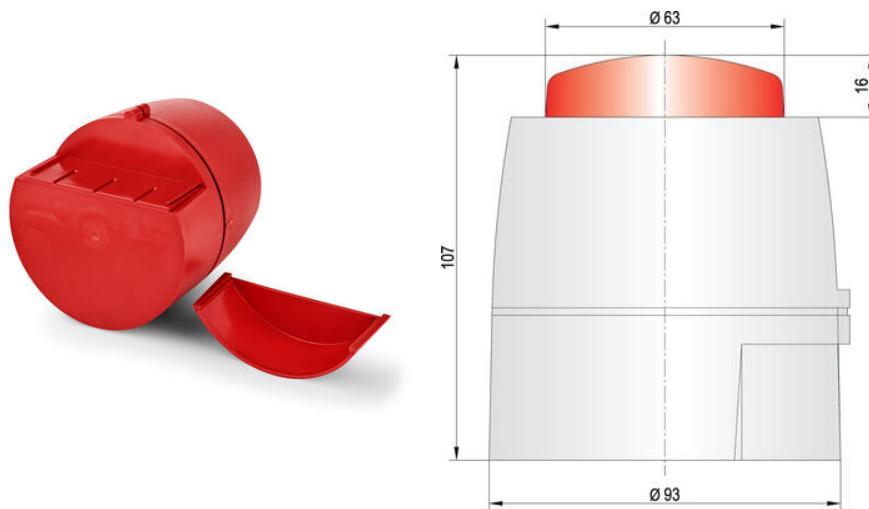

Tontabelle / Tone table

Nr.	Sound	Tone frequency	DP-value	2nd stage alarm list
1	U.S. Siren	800-1200Hz at 0.5 sec.	11111	800 count
2	Activation with 100 Hz siren	800/200 Hz at 2 Hz	111110	800 count
3	Stable Tone 100 Hz siren	800/200 Hz at 0.5 sec.	111101	800 count
4	Overload with 100 Hz siren	1000 Hz at 2 Hz	111100	900 count
5	U.S. Back up intermittent tone	2000 Hz at 1.5 sec on/off	111011	2000 count
6	U.S. Back up tone	800 Hz at 100 msec on/off	111010	800 count
7	U.S. Back up intermittent tone - test	2000 Hz at 1.50 sec on/off	111001	800 count
8	U.S. Continuous tone 1000 Hz	800 Hz cont.	111000	Some tone
9	Overload 110 Hz	800/200 Hz at 2 Hz	10111	800 count
10	Australian slow whoop	Intermittent 970 Hz 0.625 sec on/0.625 sec off	10110	500-5000 0.5 sec on 0.5 sec off
11	Dutch sweep tone	970 Hz cont.	10101	500-5000 0.5 sec on 0.5 sec off
12	Acoustic inspection	800/200 Hz at 2 Hz	10100	900 count
13	Swedish tone (3 Hz)	800/200 Hz at 2 Hz	10011	800 count
14	Swedish tone (3 Hz) - test	200/200 Hz at 2 Hz	10010	200 count
15	Swedish tone	200-2000 Hz at 2 Hz	10001	200 count
16	US Temporal Pattern 10	200 Hz for 0.5 sec on 0.5 sec off	10000	800 count
17	Intermittent tone 100 Hz	Intermittent tone 800 Hz at 0.5 sec on/off	01111	800 count
18	ISO 10011 (100 Hz 2 Hz 1 Hz)	Intermittent 970 Hz 100 Hz on 200 Hz off	01110	Some tone
19	Intermittent tone medium	1000 Hz at 0.5 sec on/off	01101	800 count
20	Swedish tone	Intermittent 200 Hz 100 Hz on 200 Hz off	01100	Some tone
21	U.S. Back up	100 Hz continuous	01011	Some tone
22	U.S. Back up	800/200 Hz at 110 Hz	01010	800 count
23	U.S. Continuous	800 Hz	01001	200 count
24	Swedish tone (3 Hz)	800/200 Hz at 2 Hz	01000	800 count
25	German 100 Hz	Intermittent 100 Hz 100 Hz on 200 Hz off	00111	800 count
26	Swedish tone (3 Hz)	Intermittent 600 Hz 100 Hz on 200 Hz off	00110	Some tone
27	French tone 20 Hz	20 Hz for 100 ms and 100 Hz for 100 ms	00100	800 count
28	Swedish tone (3 Hz)	Intermittent 200 Hz	00101	Some tone
29	US Temporal Pattern 10	2000 Hz for 0.5 sec on 0.5 sec off	00011	2000 count
30	Swedish tone (3 Hz)	2000 Hz for 1.5 sec then intermittent	00010	800 count
31	U.S. Back up	2000 Hz rising then falling @ 20 Hz	00001	800 count
32	U.S. Back up	Intermittent tone 800/200 Hz on 200 Hz off	00000	800 count
33	Swedish tone (3 Hz)	800/200 Hz at 2 Hz on/off 2 Hz on/off	00000	800 count

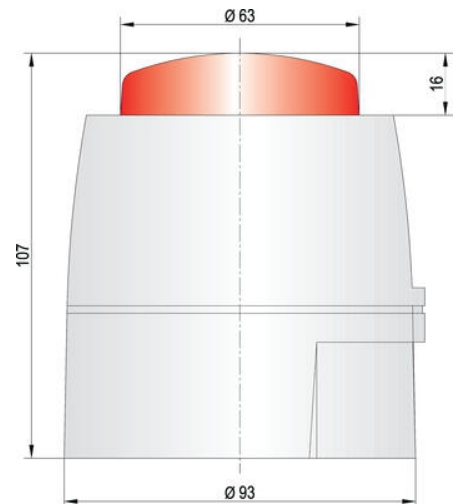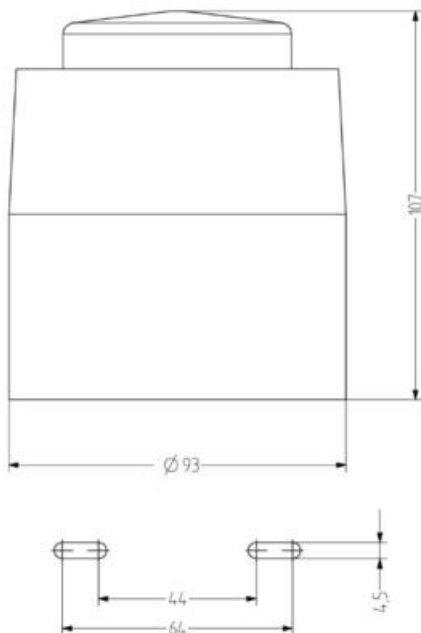

Nr.	Sound	Tone frequency	DR-switch	2nd stage alarm (Hz)
1	LF Buzzer	800 - 1000Hz at 0.5 sec	111111	800 cont
2	Alarm tone (LF) standard	800/900Hz at 2Hz	111110	800 cont
3	Warning tone (LF) standard	800/1000Hz at 0.5 sec	111101	800 cont
4	Alarm tone (LF) standard	800/900Hz at 2Hz	111100	800 cont
5	LF Buzzer (intermittent tone)	800Hz at 1.0 sec on/off	110111	800 cont
6	LF Buzzer (LF)	800Hz at 1.0 sec on/off	110110	800 cont
7	LF Buzzer (intermittent tone) - fast	800Hz at 1.0 sec on/off	110011	800 cont
8	LF (continuous tone) 800Hz	800Hz cont	110010	800 cont
9	Alarm tone (LF)	800/900Hz at 1Hz	101111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.425ms on/0.425ms off	101110	800/1000 3.75 sec on 0.425 sec off
11	Dutch sweep tone	970Hz cont	101011	0.5 sec on 0.5 sec off
12	Alarm tone (LF) standard	800/900Hz at 2Hz	101010	800 cont
13	Alarm tone (LF)	800/900Hz at 2Hz	100111	800 cont
14	Alarm tone (LF) standard	800/900Hz at 2Hz	100110	800 cont
15	LF Buzzer (LF)	800/900Hz at 0.5 sec	100011	800 cont
16	US Temporal Pattern LF	800Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	100010	800 cont
17	Intermittent tone (LF) standard	Intermittent tone 800Hz at 0.5 sec on/off	011111	800 cont
18	800/800 LF 800/800 Hz 1 Hz	Intermittent 970Hz 500ms on/500ms off	011110	800 cont
19	Intermittent tone (LF) standard	Intermittent tone 800Hz at 0.5 sec on/off	011101	800 cont
20	800/800 LF	Intermittent 970Hz 500ms on/500ms off	011100	800 cont
21	Continuous tone	1020Hz continuous	010111	800 cont
22	LF Buzzer	800/900Hz on/off at 1.0 sec	010110	800 cont
23	LF (Continuous)	800Hz	010011	800 cont
24	Alarm tone (LF)	800/900Hz at 2Hz	010010	800 cont
25	German (LF) tone	800Hz at 1.0 sec on/off	001111	800 cont
26	Standard (LF) tone	Intermittent 650Hz 150 ms on / 500 ms off	001110	800 cont
27	French tone (LF)	Intermittent 650Hz 150 ms on / 500 ms off	001101	800 cont
28	Standard (LF) tone	Intermittent 650Hz 150 ms on / 500 ms off	001100	800 cont
29	US Temporal Pattern LF	800Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	000111	800 cont
30	Alarm tone (LF) standard	Intermittent 650Hz 150 ms on / 500 ms off	000110	800 cont
31	LF (Continuous)	800Hz	000101	800 cont
32	Alarm tone (LF) standard	Intermittent 650Hz 150 ms on / 500 ms off	000100	800 cont

