



FŰTÉS 8-13W - RC 016

01610.0-00

RC 016 13W Heater, 170°C, 110-250V ac/dc



- Kompakt
- Önszabályozó



TERMÉKLEÍRÁS

The heat source in this Stego element consists of a PTC element – a semi-conductor that adapts its output to the ambient temperature.

The PTC element has a high starting current and provides full output almost immediately.


The current then falls quickly and the element is thereafter self-regulating, meaning that the warmer the surroundings, the less output produced by the element.

The heating element is best installed in small enclosures so as avoid condensation or that the temperature falls beneath the minimum. These heaters are designed for permanent operation.

MŰSZAKI ADATOK

Heat Output	13 W
Heater	Eloxált alumínium
Humidity Storage	<90 % RH
IP-osztály	IP54
Jóváhagyások	CE, EAC, Gost R, RoHS, UL E150057, VDE
Kábelhossz	340 mm
Magasság	60 mm
Max. feszültség	265 V ac/dc
Max. indítóáram	3 A
Mélység	12,5 mm
Nominal voltage	120-240 V AC/DC

Operating Humidity	< 90% RH
Operational Temperature	-45°C ... +70°C
Pre fuse (slow)	4 A
Szélesség	25 mm
Tárolási hőmérséklet	-45°C ... +70°C
Tömeg	0,04 kg
Védelmi osztály	II (kettős szigetelésű)
Voltage min	110 V ac/dc

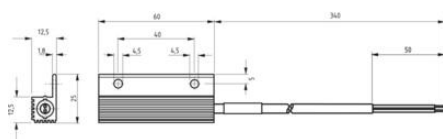

Thermostat
KTO 011 (NC)

Heater RC 016

