



EMOS ETHERNET KAMERA

ORL0186030

EMOS 60 Ethernet kamera

- 12 vagy 24 VDC
- 4 tűs M12 Ethernet csatlakozó D-kóddal, 0,5 M kábellel
- IP67, IP69K névleges
- Robusztus eloxált alumínium kameraház és tartós szintetikus hőre lágyuló polimer, amely az autópárhoz igazodik.
- 0,24 kg (kábelrel és tartóval együtt)



TERMÉKLEÍRÁS

MŰSZAKI ADATOK

Anyag	Eloxált alumínium
Camera Angle	60
IP-osztály	IP68, IP69K
Max. tápfeszültség, DC	24 V DC
Max. üzemi hőmérséklet	85 °C
Min. tápfeszültség, DC	12 V DC
Min. üzemi hőmérséklet	-40 °C
Vibrációállóság	50 g

Camera EMOS Ethernet Front side of Molded M12-D 4p connector:




Connector

- 1 = Orange/white = +Tx
2 = Green/white = +Rx
3 = Orange = -Tx
4 = Green = -Rx

Overall shielding connected to connector housing.

Open wires

- Open wires**
1 = Red = Power
2 = White = 0V

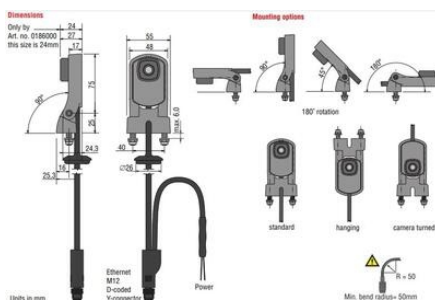

Camera EMOS Ethernet Front side of Molded M12-D 4p connector:



Connector

- 1 = Orange/white = +Tx
2 = Green/white = +Rx
3 = Orange = -Tx
4 = Green = -Rx


Overall shielding connected to connector housing.

Open wires


- Open wires**
1 = Red = Power
2 = White = 0V

Dimensions

Only by _____
Art. no. 0186000
this size is 24mm

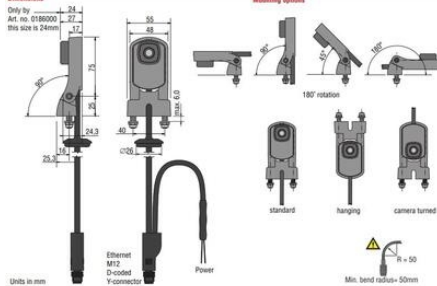

Mounting options



standard

hanging

camera turned



Min. bend radius= 50mm