RUGALMAS KÁBELEK

ORL0304371
Flexibilis Kábel




- Puha felület kis hajlítási sugárral
- 4 és 7 tűs öntött csatlakozók M 16
- -40 és +85 °C között

TERMÉKLEÍRÁS

MŰSZAKI ADATOK


Anyag	PUR
IP-osztály	IP67
Kábelátmérő	9 mm
Kábelhossz	500 mm
Max. üzemi hőmérséklet	85 °C
Min. üzemi hőmérséklet	-40 °C
Type	Analóg




Front side
4p Male connector

Electrical connection

1 = coax core	Video
2 = coax shielding	Video GND
3 = red	12...30V/DC
4 = black	0V
Orange	N.C.
Yellow	N.C.
Grey	N.C.



Front side
4p Female connector





Solder side
7P Male connector


Electrical connection
Soldering of connectors (female 1311250 + male 1322450)
1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3




Solder side
7P Female connector




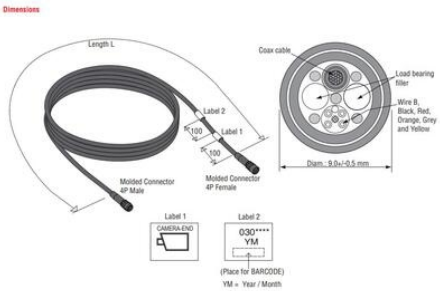

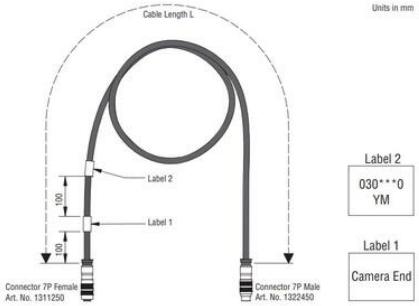



Front side
4p Male connector



Front side
4p Female connector

Electrical connection

1 = coax core	Video
2 = coax shielding	Video GND
3 = red	12...30V/DC
4 = black	0V
Orange	N.C.
Yellow	N.C.
Grey	N.C.



Solder side
7P Male connector




Solder side
7P Female connector

Electrical connection

Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimensions

