



Vizsgálat

ORLACO®

## RUGALMAS KÁBELEK

ORL0304381  
Flexibilis Kábel


- Puha felület kis hajlítási sugárral
- 4 és 7 tűs öntött csatlakozók M 16
- -40 és +85 °C között




### TERMÉKLEÍRÁS

### MŰSZAKI ADATOK

|                        |         |
|------------------------|---------|
| Anyag                  | PUR     |
| IP-osztály             | IP67    |
| Kábelátmérő            | 9 mm    |
| Kábelhossz             | 6000 mm |
| Max. üzemi hőmérséklet | 85 °C   |
| Min. üzemi hőmérséklet | -40 °C  |
| Type                   | Analóg  |




Front side  
4p Male connector



Front side  
4p Female connector

#### Electrical connection

1 = coax core Video  
2 = coax shielding Video GND  
3 = red 12...30V/DC  
4 = black 0V  
Orange N.C.  
Yellow N.C.  
Grey N.C.



Solder side  
7P Male connector




Solder side  
7P Female connector


#### Electrical connection




Soldering of connectors (female 1311250 + male 1322450)

1 = Video  
2 = Video GND  
3 = Power input  
4 = 0V  
5 = Aux 1  
6 = Aux 2  
7 = Aux 3



#### Dimensions


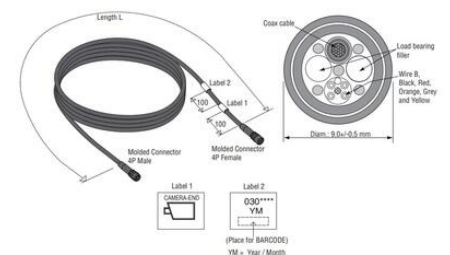


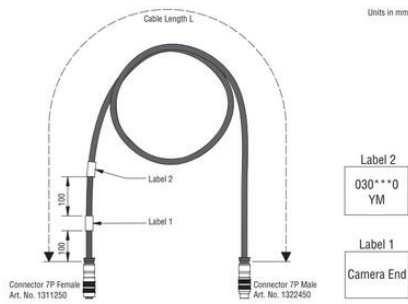

### Electrical connection

1 = coax core  
2 = coax shielding  
3 = red  
4 = black  
Orange  
Yellow  
Grey


Video  
Video GND  
12...30V/DC  
0V  
N.C.  
N.C.  
N.C.



### Electrical connection

Soldering of connectors (female 1311250 + male 1322450)

1 = Video  
2 = Video GND  
3 = Power input  
4 = 0V  
5 = Aux 1  
6 = Aux 2  
7 = Aux 3



### Dimensions

