



Vizsgálat

ORLACO®

RUGALMAS KÁBELEK

ORL0301731
Flexibilis Kábel


- Puha felület kis hajlítási sugárral
- 4 és 7 tűs öntött csatlakozók M 16
- -40 és +85 °C között




TERMÉKLEÍRÁS

MŰSZAKI ADATOK

Anyag	PUR
IP-osztály	IP67
Kábelátmérő	9 mm
Kábelhossz	15000 mm
Max. üzemi hőmérséklet	85 °C
Min. üzemi hőmérséklet	-40 °C
Type	Analóg



Front side
4p Male connector



Front side
4p Female connector

Electrical connection

1 = coax core Video
2 = coax shielding Video GND
3 = red 12...30V/DC
4 = black 0V
Orange N.C.
Yellow N.C.
Grey N.C.




Solder side
7P Male connector




Solder side
7P Female connector




Electrical connection

Soldering of connectors (female 1311250 + male 1322450)
1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimensions


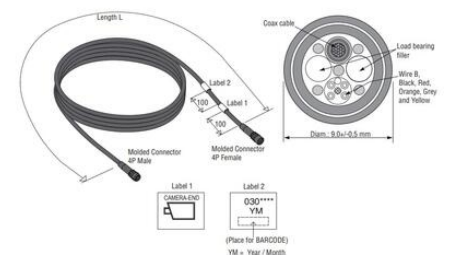


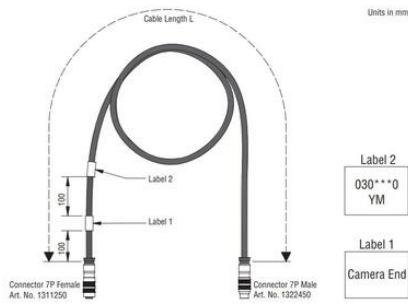

Electrical connection

1 = coax core
2 = coax shielding
3 = red
4 = black
Orange
Yellow
Grey


Video
Video GND
12...30V/DC
0V
N.C.
N.C.
N.C.



Electrical connection

Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimensions

