KÁBELEK CSATLAKOZÓKKAL

ORL0301960
Kábel 1m 4 Pin


- 4 tűs és 7 tűs M16 csatlakozók
- Az Orlaco fejlesztette ki a legjobb EMC védelem érdekében
- -40 és +85 °C között




TERMÉKLEÍRÁS

MŰSZAKI ADATOK

Anyag	PVC
IP-osztály	IP67
Kábelátmérő	6 mm
Kábelhossz	1000 mm
Max. üzemi hőmérséklet	85 °C
Min. üzemi hőmérséklet	-40 °C
Type	Analóg




Front side
female connector



Front side
male connector


Electrical connection

1 = Coax core	= Video signal
2 = Coax shielding	= Video GND
3 = Red	= 12V/DC
4 = Black	= 0V
Shielding	= GND




Front side molded
7P Female connector


Electrical connection
molded connectors
1 = Coax Core
2 = Coax Shield
3 = Red (Power input)
4 = Black (0V)
5 = Orange (Rx)
6 = Yellow (Tx)
7 = Grey (Aux)




Front side molded
7P Male connector

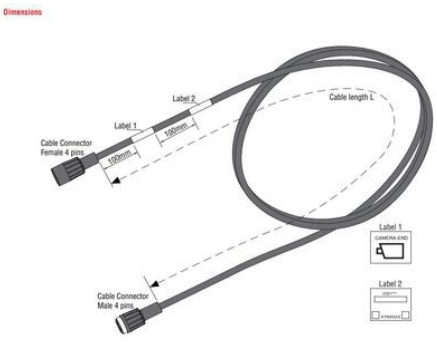





Front side
female connector




Front side
male connector

Electrical connection

1 = Coax core	= Video signal
2 = Coax shielding	= Video GND
3 = Red	= 12V/DC
4 = Black	= 0V
Shielding	= GND



Front side molded
7P Female connector



Front side molded
7P Male connector

Electrical connection
molded connectors

1 = Coax Core
2 = Coax Shield
3 = Red (Power input)
4 = Black (0V)
5 = Orange (Rx)
6 = Yellow (Tx)
7 = Grey (Aux)

Dimensions

