



## TÁPEGYSÉG 1 FÁZIS, 5 VDC MINILINE SZÉRIA

5-5,5 V DC, 3 A és 5 A

ML60.242

PSU 100-240V ac I/P 24V dc 2.5A 60W O/P -40°C

# PULS



- Kimeneti áramerősség 3 A and 5 A
- 80%-os hatásfok
- AC és DC bemeneti feszültség
- 22.5 mm széles
- 3 év garancia


### TERMÉKLEÍRÁS

## MŰSZAKI ADATOK

Clamp type	Felcsavarozható
Efficiency At 120 V AC, full load. Typical	88,5 %
Efficiency At 230 V AC, full load. Typical	90,4 %
Fázisok száma	1
Hold-up time at 120 V AC, full load. Typical.	24 ms
Hold-up time at 230 V AC, full load. Typical.	107 ms
Input voltage AC	100-240 V
Input voltage ac max	264 V AC
Input voltage ac min	85 V AC
Input voltage DC	110-300 V
Input voltage dc max	375 V DC
Input voltage dc min	88 V DC
Input voltage range	Wide-range
Inrush current at 120 V ac typical	6 A
Inrush current at 230 V ac typical	6 A
IP-osztály	IP20
Jóváhagyások	ABS, CB, CE, CSA, GL, NEC Class 2, UL
Lifetime at 120 V ac, full load and +40 ° C	66000 h
Lifetime at 230 V ac, full load and +40 ° C	90000 h

Magasság	75 mm
Mélység	91 mm
MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C	1866000 h
Output Current	2,5 A
Output voltage	24 V DC
Output voltage max	28 V DC
Output voltage min	24 V DC
Power Consumption At 120 V AC	1,05 A
Power Consumption At 230 V AC	0,66 A
Power Factor at 120 V AC, full load. Typical	0,54
Power Factor at 230 V AC, full load. Typical	0,44
Power Reduction Of 60 To 70 ° C	1,5 W/°C
Ripple. max	50 mV pp
Series	Miniline
Supply Frequency	50-60 ±6 %
Szélesség	45 mm
Teljesítmény	60 W
Temperature Range Without Derating From	-40 °C
Temperature Range Without Derating To	60 °C
Tömeg	0,25 kg
Védőanyag	ABS műanyag

Fig. 5-1 Output voltage vs. output current, typ.

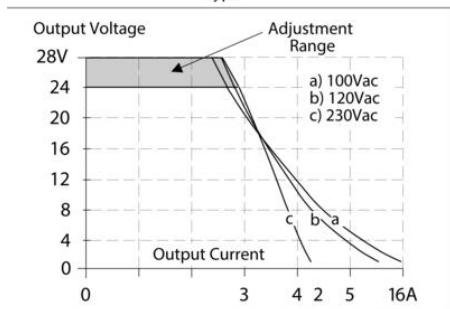

Output power vs. ambient temp.

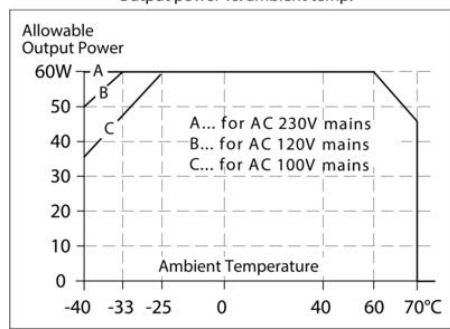


Fig. 8-1 Efficiency vs. output current at 24V, typ.

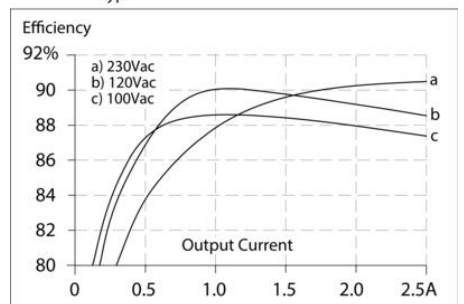


Fig. 8-2 Losses vs. output current at 24V, typ.

