



TÁPEGYSÉG 1 FÁZIS, 12 VDC MINILINE SZÉRIA

10-12 V DC, 3 A és 12-15 V DC, 4,2 A

ML70.100

PSU 100-120/220-240V ac I/P 24V dc 3A 72W O/P

- Kimeneti áramerősség 2.5 A vagy 4.2 A
- Magas hatásfok
- Helytakarékos
- Képes kezelni a magas indítási illetve túlterhelési áramot is
- Rugós csatlakozás



PULS


TERMÉKLEÍRÁS

MŰSZAKI ADATOK

Efficiency At 230 V AC, full load. Typical	89 %
Fázisok száma	1
Hold-up time at 120 V AC, full load. Typical.	25 ms
Hold-up time at 230 V AC, full load. Typical.	40 ms
Input voltage AC	100-120, 220-240 V
Input voltage ac max	264 V AC
Input voltage ac min	85 V AC
Input voltage DC	290 V
Input voltage dc max	375 V DC
Input voltage dc min	220 V DC
Input voltage range	Switch
Inrush current at 120 V ac typical	26 A
Inrush current at 230 V ac typical	30 A
IP-osztály	IP20
Jóváhagyások	CB, CE, CSA, GL, NEC Class 2, UL
Magasság	75 mm

Mélység	91 mm
MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C	600000 h
Output Current	3 A
Output voltage	24 V DC
Output voltage max	28 V DC
Output voltage min	24 V DC
Power Consumption At 120 V AC	1,6 A
Power Consumption At 230 V AC	0,8 A
Power Factor at 120 V AC, full load. Typical	0,54
Power Factor at 230 V AC, full load. Typical	0,54
Power Reduction Of 60 To 70 ° C	1,8 W/°C
Ripple. max	50 mV pp
Series	Miniline
Supply Frequency	50-60 ±6 %
Szélesség	45 mm
Teljesítmény	72 W
Temperature Range Without Derating From	-10 °C
Temperature Range Without Derating To	60 °C
Tömeg	0,26 kg
Védőanyag	ABS műanyag

Output characteristic V_{out} / I_{out}
(min.)

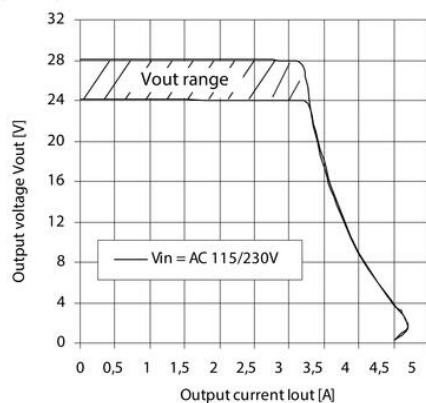

Efficiency
(@ $V_{out} = 24.5V$, typ.)

