



TÁPEGYSÉG 1 FÁZIS, 24VDC DIMENSION C SZÉRIA

24-28 V DC, 20 A

CPS20.241
PSU 100-240V ac I/P 24V dc 20A 480W O/P

- Kimeneti áramerősség 20 A
- 94%-os hatásfok
- 65 mm széles
- 20% teljesítménytartalék
- Hiccup Plus

PULS






TERMÉKLEÍRÁS

MŰSZAKI ADATOK

Active Transient	Igen
Clamp type	Felcsavarozható
DC relay output	Igen
Efficiency At 120 V AC, full load. Typical	92,7 %
Efficiency At 230 V AC, full load. Typical	94 %
Efficiency At 230 V AC. Typical	93,3 %
Fázisok száma	1
Hold-up time at 120 V AC, full load. Typical.	26 ms
Hold-up time at 230 V AC, full load. Typical.	26 ms
Input current at 230 V ac typical	7 A
Input voltage AC	100-240 V
Input voltage ac max	264 V AC
Input voltage ac min	85 V AC
Input voltage range	Wide-range
Inrush current at 120 V ac typical	9 A
IP-osztály	IP20

Jóváhagyások	ABS, CB, CE, CSA, EX, GL, IECEx, UL
Lifetime at 120 V ac, full load and +40 ° C	70000 h
Lifetime at 230 V ac, full load and +40 ° C	88000 h
Magasság	124 mm
Mélység	127 mm
MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C	537000 h
Output Current	20 A
Output voltage	24 V DC
Output voltage max	28 V DC
Output voltage min	24 V DC
Power Consumption At 120 V AC	4,36 A
Power Consumption At 230 V AC	2,33 A
Power Factor at 120 V AC, full load. Typical	0,99
Power Factor at 230 V AC, full load. Typical	0,95
Power Reduction Of 60 To 70 ° C	12 W/°C
Ripple. max	50 mV pp
Series	Dimension C
Supply Frequency	50-60 ±6 %
Szélesség	65 mm
Teljesítmény	480 W
Temperature Range Without Derating From	-25 °C
Temperature Range Without Derating To	60 °C
Tömeg	1 kg
Védőanyag	Alumínium

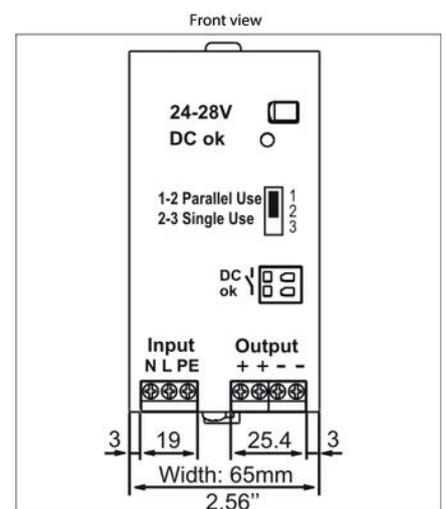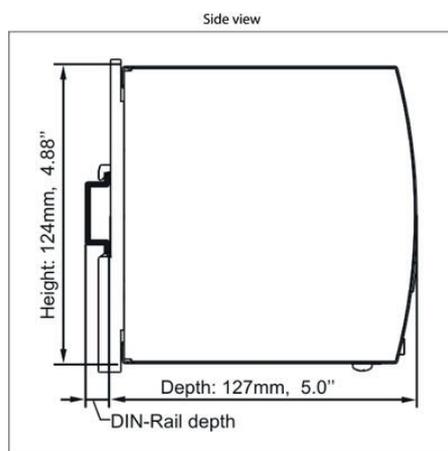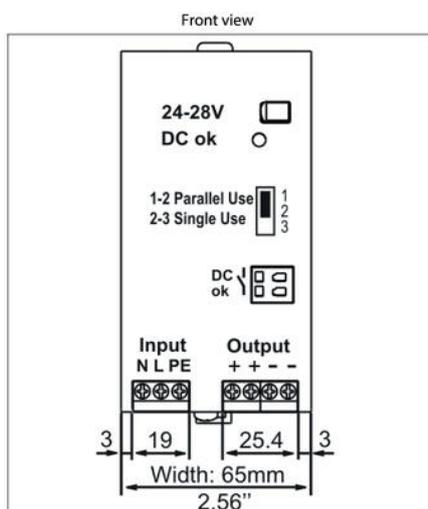

Side view

