



TÁPEGYSÉG 1 FÁZIS, 24 VDC DIMENSION C SZÉRIA, GENERATION 2

24-28 V DC, 20 A

CP20.241
PSU 100-240V ac I/P 24V dc 20A 480W O/P

- Kimeneti áramerősség 20A
- 48 mm széles
- Fémház
- 20 % teljesítménytartalék
- Hiccup Plus

PULS











TERMÉKLEÍRÁS

MŰSZAKI ADATOK


Active Transient	Igen
Clamp type	Csavar
DC relay output	Igen
Efficiency At 120 V AC, full load. Typical	94,2 %
Efficiency At 230 V AC, full load. Typical	95,6 %
Efficiency At 230 V AC. Typical	95 %
Fázisok száma	1
Hold-up time at 120 V AC, full load. Typical.	32 ms
Hold-up time at 230 V AC, full load. Typical.	32 ms
Input current at 230 V ac typical	4,5 A
Input voltage AC	100-240 V
Input voltage ac max	264 V AC
Input voltage ac min	85 V AC
Input voltage DC	110-150 V
Input voltage dc max	180 V DC
Input voltage dc min	88 V DC

Input voltage range	Wide-range
Inrush current at 120 V ac typical	10 A
IP-osztály	IP20
Jóváhagyások	ATEX, CB, CE, CSA US, cULus, IECEx
Lifetime at 120 V ac, full load and +40 ° C	60000 h
Lifetime at 230 V ac, full load and +40 ° C	94000 h
Magasság	124 mm
Mélység	127 mm
MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C	590000 h
Output Current	20 A
Output voltage	24 V DC
Output voltage max	28 V DC
Output voltage min	24 V DC
Power Consumption At 120 V AC	4,26 A
Power Consumption At 230 V AC	2,23 A
Power Factor at 120 V AC, full load. Typical	0,99
Power Factor at 230 V AC, full load. Typical	0,98
Power Reduction Of 60 To 70 ° C	12 W/°C
Ripple. max	50 mV pp
Series	Dimension C
Supply Frequency	50-60 ±6 %
Szélesség	48 mm
Teljesítmény	480 W
Temperature Range Without Derating From	-25 °C
Temperature Range Without Derating To	60 °C
Tömeg	0,83 kg
Védőanyag	Alumínium

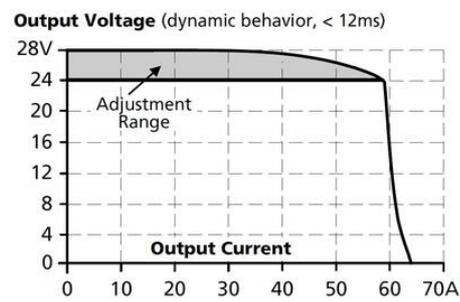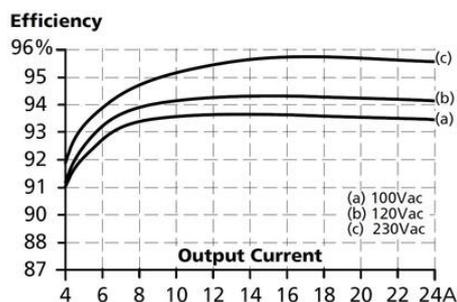
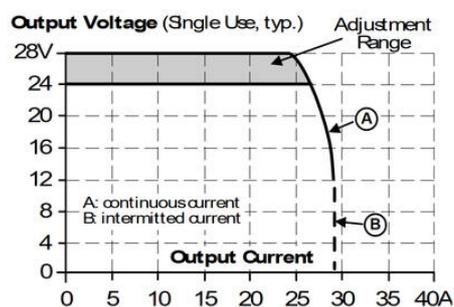


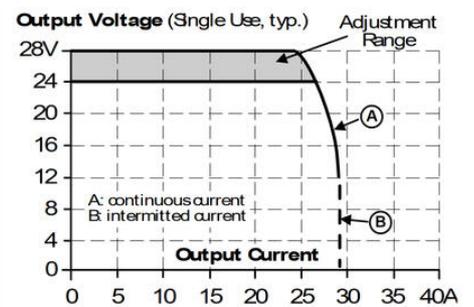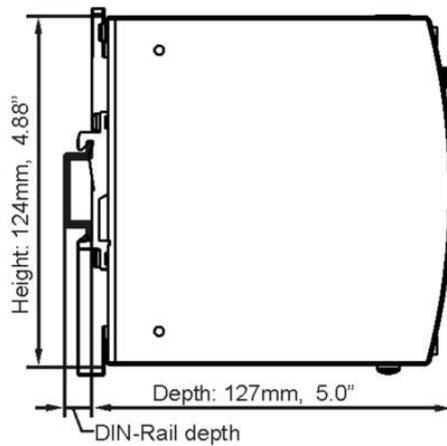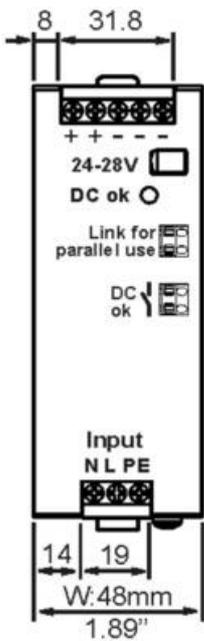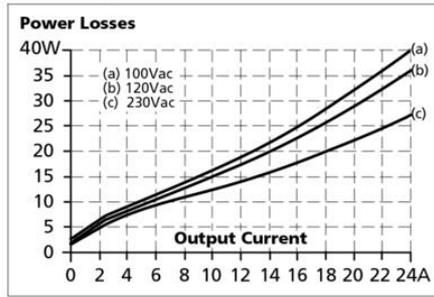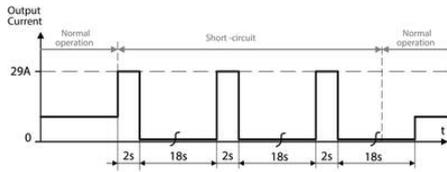

Efficiency

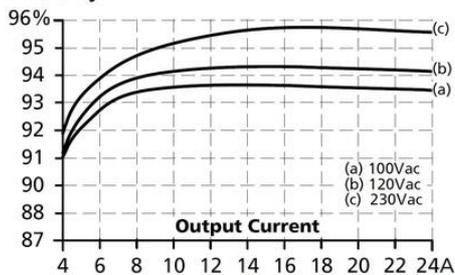

Output Voltage (dynamic behavior, < 12ms)

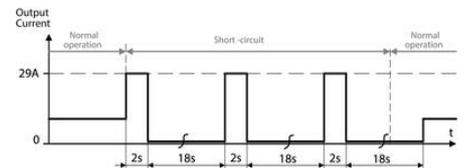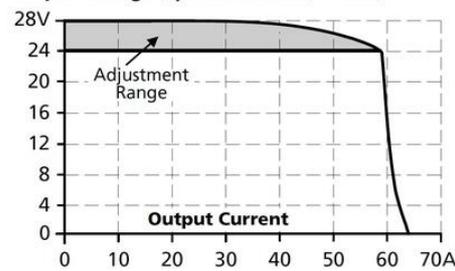

Power Losses

