



TÁPEGYSÉG 1 FÁZIS, 24 VDC DIMENSION C SZÉRIA, GENERATION 2

24-28 V DC, 20 A

CP20.241
PSU 100-240V ac I/P 24V dc 20A 480W O/P

- Kimeneti áramerősség 20A
- 48 mm széles
- Fémház
- 20 % teljesítménytartalék
- Hiccup Plus

PULS














TERMÉKLEÍRÁS

MŰSZAKI ADATOK

| | |
|-----------------------------------------------|-----------|
| Active Transient | Igen |
| Clamp type | Csavar |
| DC relay output | Igen |
| Efficiency At 120 V AC, full load. Typical | 94,2 % |
| Efficiency At 230 V AC, full load. Typical | 95,6 % |
| Efficiency At 230 V AC. Typical | 95 % |
| Fázisok száma | 1 |
| Hold-up time at 120 V AC, full load. Typical. | 32 ms |
| Hold-up time at 230 V AC, full load. Typical. | 32 ms |
| Input current at 230 V ac typical | 4,5 A |
| Input voltage AC | 100-240 V |
| Input voltage ac max | 264 V AC |
| Input voltage ac min | 85 V AC |
| Input voltage DC | 110-150 V |
| Input voltage dc max | 180 V DC |
| Input voltage dc min | 88 V DC |

| | |
|-------------------------------------------------|------------------------------------|
| Input voltage range | Wide-range |
| Inrush current at 120 V ac typical | 10 A |
| IP-osztály | IP20 |
| Jóváhagyások | ATEX, CB, CE, CSA US, cULus, IECEx |
| Lifetime at 120 V ac, full load and +40 ° C | 60000 h |
| Lifetime at 230 V ac, full load and +40 ° C | 94000 h |
| Magasság | 124 mm |
| Mélység | 127 mm |
| MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C | 590000 h |
| Output Current | 20 A |
| Output voltage | 24 V DC |
| Output voltage max | 28 V DC |
| Output voltage min | 24 V DC |
| Power Consumption At 120 V AC | 4,26 A |
| Power Consumption At 230 V AC | 2,23 A |
| Power Factor at 120 V AC, full load. Typical | 0,99 |
| Power Factor at 230 V AC, full load. Typical | 0,98 |
| Power Reduction Of 60 To 70 ° C | 12 W/°C |
| Ripple. max | 50 mV pp |
| Series | Dimension C |
| Supply Frequency | 50-60 ±6 % |
| Szélesség | 48 mm |
| Teljesítmény | 480 W |
| Temperature Range Without Derating From | -25 °C |
| Temperature Range Without Derating To | 60 °C |
| Tömeg | 0,83 kg |
| Védőanyag | Alumínium |

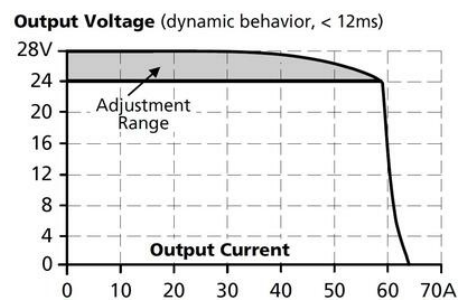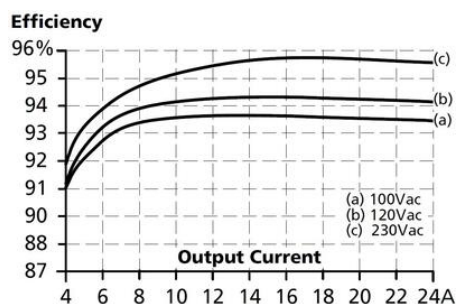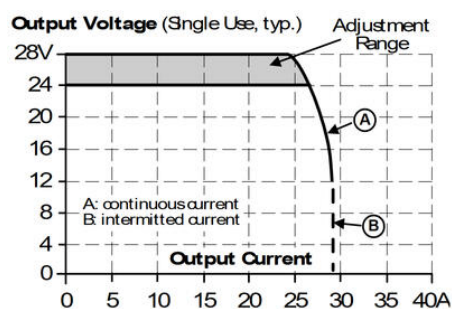

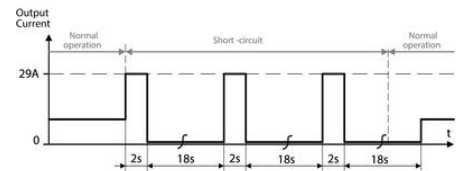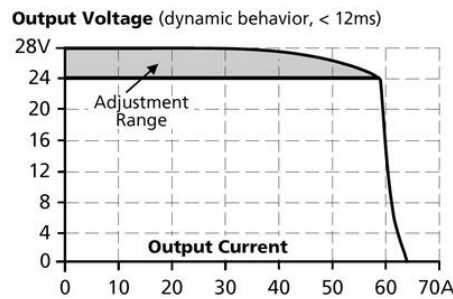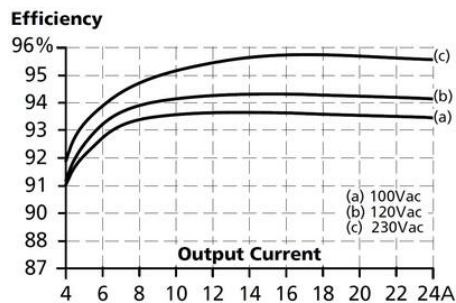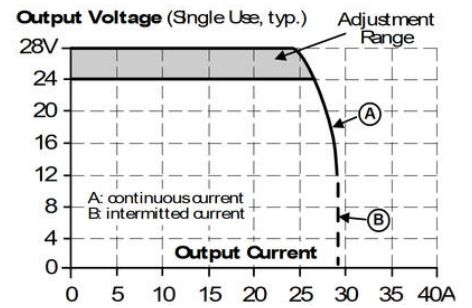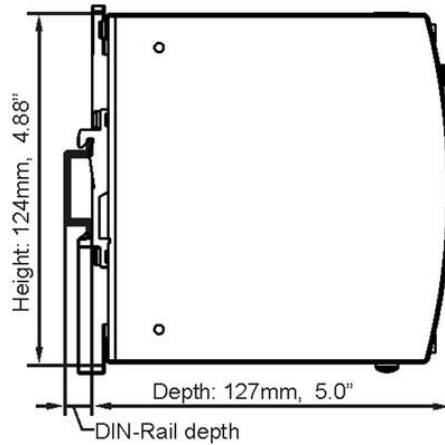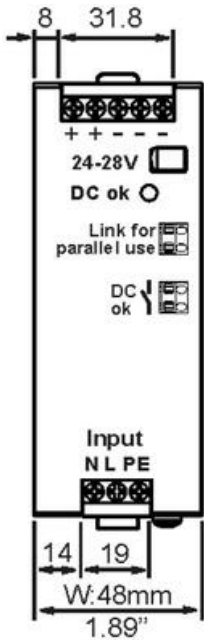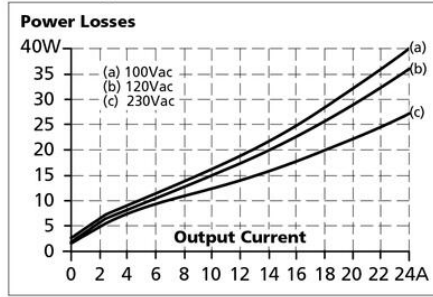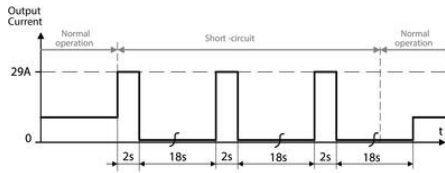

Power Losses

