



DIMENSION DC/DC KONVERTER

110/24 V DC, 8,3 A

CP10.241-60

PSU 96-110 V DC/24-28 V DC, 8.3 A, Railway EN50155

PULS

- 39 mm széles
- 94,5 %-os hatásfok
- EN 50155 vasúti alkalmazásokra vonatkozó szabvány szerint
- Conformal bevonatos elektronikai áramkörtábla
- Széles hőmérséklet tartomány -40°C...+70°C



TERMÉKLEÍRÁS

MŰSZAKI ADATOK

Bekapcsolási túláram	Typ. 2,5 A @ 110 V DC
Conformal coated	Igen
DC relay output	Igen
Efficiency	94,5 %
Élettartam	119000 h @ 110 V DC, 8,3 A, 40 °C
Input voltage DC	110 V
Input voltage dc max	154 V DC
Input voltage dc min	67 V DC
IP-osztály	IP20
Jóváhagyások	CE, EN 50155
Keep time	Typ. 45 ms @ 110 V DC, 8,3 A
Magasság	124 mm
Max entrance tripple	15 V pp
Mélység	117 mm
MTBF (IEC 61709)	tbd
Output Current	8,3 A

Output voltage	24 V DC
Output voltage max	28 V DC
Output voltage min	24 V DC
Ripple. max	50 mV pp
Series	Dimension C
Start-Up Delay	600 ms
Szélesség	39 mm
Teljesítmény	200 W
Temperature Range Without Derating From	-40 °C
Temperature Range Without Derating To	70 °C
Tömeg	0,62 kg
Védőanyag	Alumínium

Fig. 6-2 Dynamic output current capability, typ.

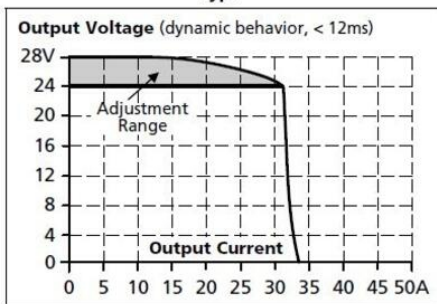


Fig. 6-1 Output voltage vs. output current, typ.

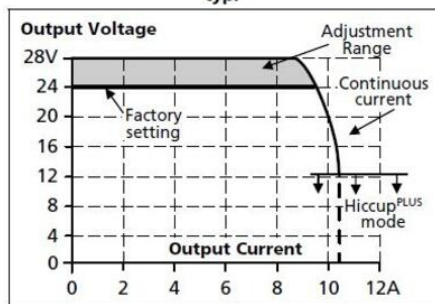


Fig. 16-1 Output current vs. ambient temp. at 24V output voltage

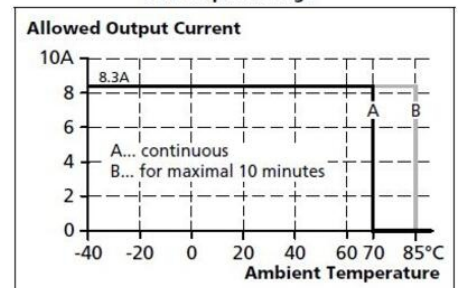


Fig. 10-1 Efficiency vs. output current, at 24V, typ.

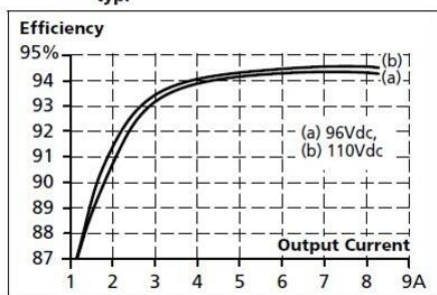


Fig. 6-3 Short-circuit on output, HiccupPLUS mode, typ.

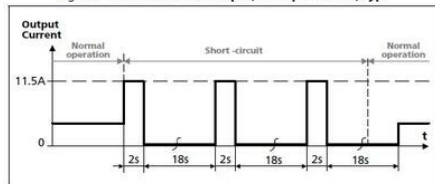


Fig. 14-1 Front side



Fig. 22-1 Front view

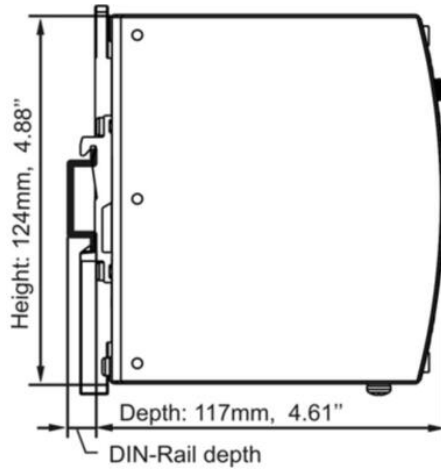
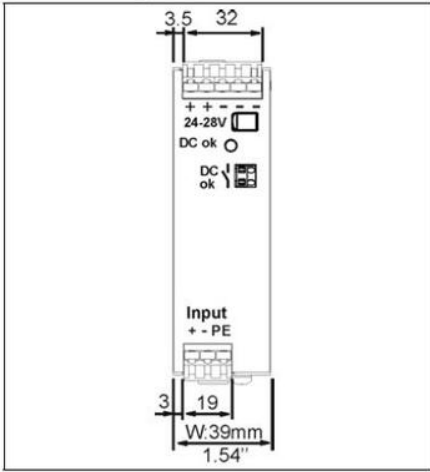


Fig. 6-2 Dynamic output current capability, typ.

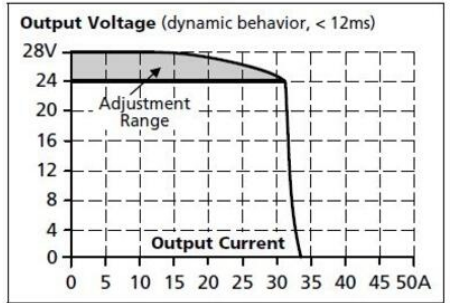


Fig. 6-1 Output voltage vs. output current, typ.

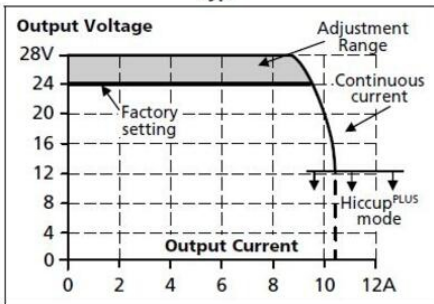


Fig. 16-1 Output current vs. ambient temp. at 24V output voltage

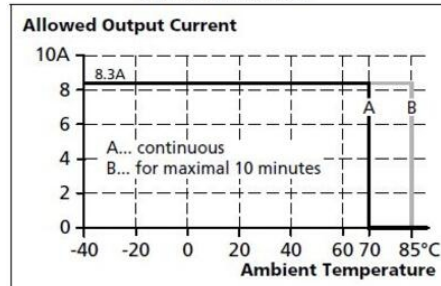


Fig. 10-1 Efficiency vs. output current, at 24V, typ.

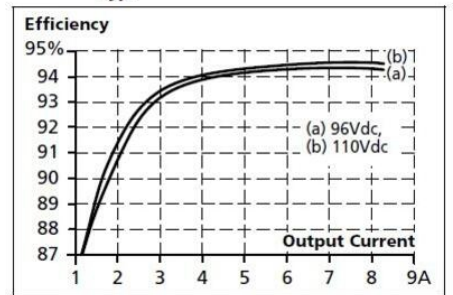


Fig. 6-3 Short-circuit on output, Hiccup^{PLUS} mode, typ.

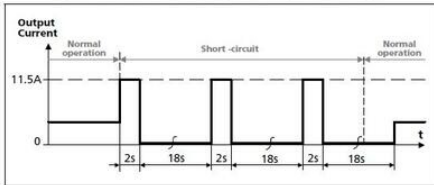


Fig. 14-1 Front side



Fig. 22-1 Front view

