



## TÁPEGYSÉG 1 FÁZIS, 24 VDC PIANO SZÉRIA

24-28 V DC, 20 A

PIC480.241C

PSU 200-240V ac I/P 24V dc 20A 480W O/P

- 49 mm széles
- 95,7%-os hatásfok
- DC-OK relé
- Polikarbonát burkolat
- DC OK relé kimenet

# PULS




### TERMÉKLEÍRÁS

## MŰSZAKI ADATOK


Clamp type	Csavar
DC relay output	Igen
Efficiency At 230 V AC, full load. Typical	95,7 %
Efficiency At 230 V AC. Typical	95,2 %
Fázisok száma	1
Hold-up time at 230 V AC, full load. Typical.	30 ms
Input voltage AC	200-240 V
Input voltage ac max	264 V AC
Input voltage ac min	180 V AC
Inrush current at 230 V ac typical	26 A
IP-osztály	IP20
Jóváhagyások	CB, CE, cRUus, cULus
Lifetime at 230 V ac, full load and +40 ° C	51000 h
Magasság	124 mm
Mélység	124 mm

MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C	482000 h
Output Current	20 A
Output voltage	24 V DC
Output voltage max	28 V DC
Output voltage min	24 V DC
Power Consumption At 230 V AC	2,2 A
Power Factor at 230 V AC, full load. Typical	0,99
Power Reduction Of 60 To 70 ° C	8 W/°C
Ripple. max	100 mV pp
Series	Piano
Supply Frequency	50-60 ±6 %
Szélesség	49 mm
Teljesítmény	480 W
Temperature Range Without Derating From	-25 °C
Temperature Range Without Derating To	55 °C
Tömeg	0,62 kg
Védőanyag	Polikarbonát


**Efficiency**

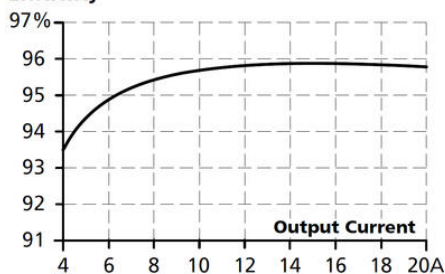


**Power Losses**

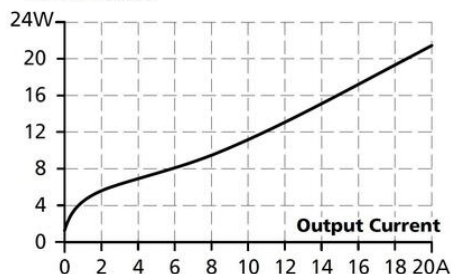


**Output Voltage**

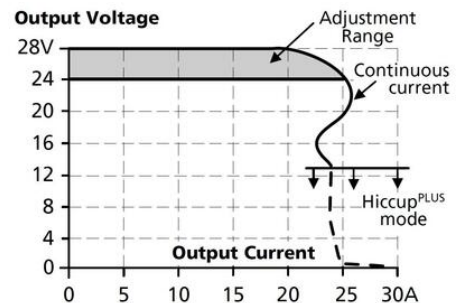

**Output Current**

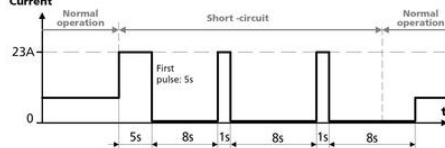

**Allowable Output Current at 24V**

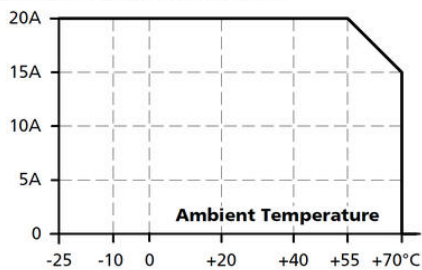

**Fig. 20-1 Front view**

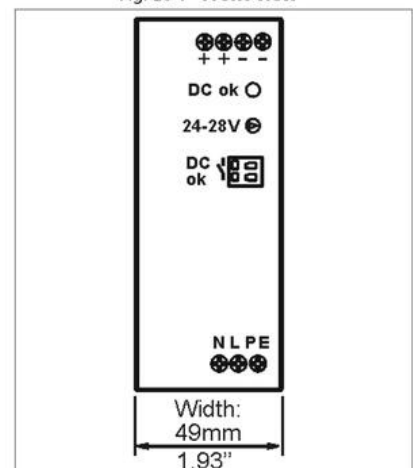


Fig. 20-3 Side view

