



83 106 DUPLA MEGSZAKÍTÓ

Mikrokapcsoló

83106022
831060 D/MEGSZ., W3


- Megszakító és záró érintkezők
- Bistabil vagy rugós kivitel
- Üzemi hőmérséklet -40 és +85 ° C között




TERMÉKLEÍRÁS

MŰSZAKI ADATOK


A visszatérő mozgás min. ereje	1 N
Csatlakozás	W3
Érintkezés típusa	1 NO, 1 NC
IP-osztály	IP40
Kapcsolópont	11,45±0,2-0,25
Max. hiszterézis	0,7 mm
Max. készenlét	12,75 mm
Max. működési erő	4 N
Max. üzemi hőmérséklet	85 °C
Megengedett max. túlfeszültség	20 N
Min. túlszabályozás	0,7 mm
Min. üzemi hőmérséklet	-40 °C
Névleges áramerősség, 250 V AC	5 A
Nyitási távolság	0,4 x 2 mm
Termikus áramerősség, 250 V AC	17,5 A
Várható mechanikai élettartam	10 ⁷ művelet (terhelés nélkül)

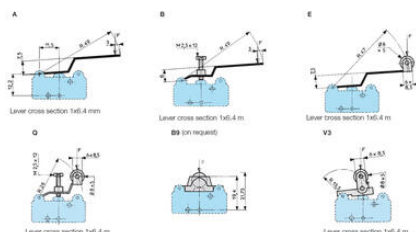

W3 for 6.35 mm clips

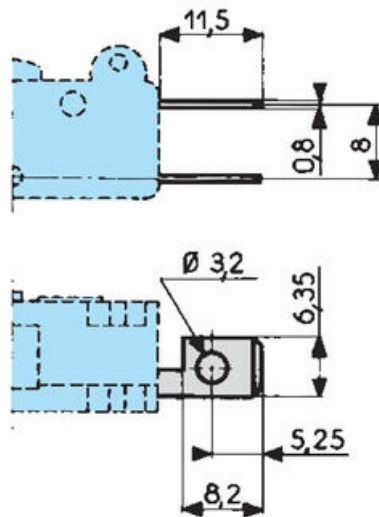


83 106

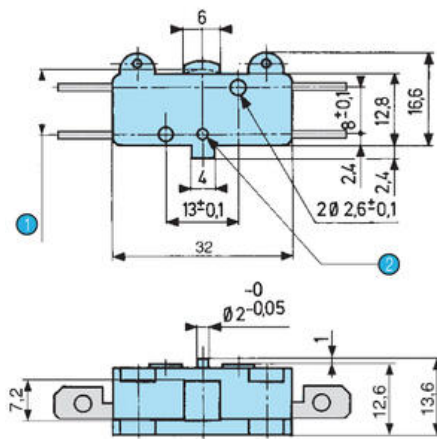


- 1 OL = 10.65
- 2 $\varnothing 2^{+0.01}_{-0.05}$ depth 1.2


83 106 7




83 106 4

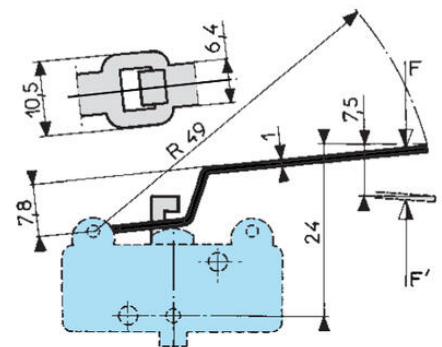


W1 screw

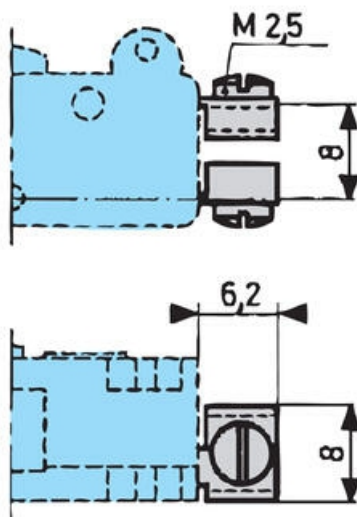



W2 solder

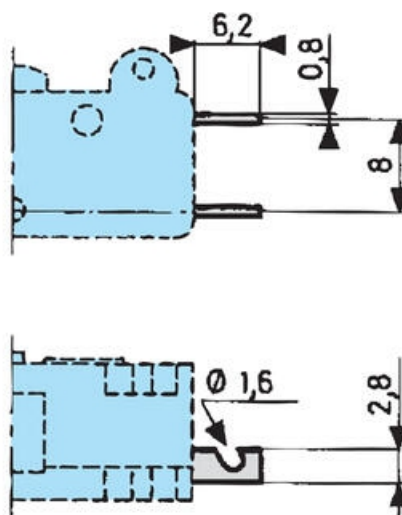


O2 2-pole side mounting plate

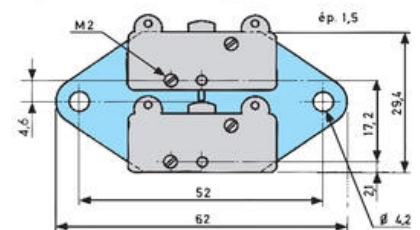


K2 (on request)
2-pole vertical mounting plate




Y (on request)
side plate





H
Horizontal single pole mounting plate




Without indication, the thickness of the plate is 1.5 mm

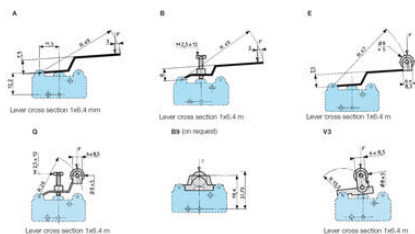



W3 for 6.35 mm clips

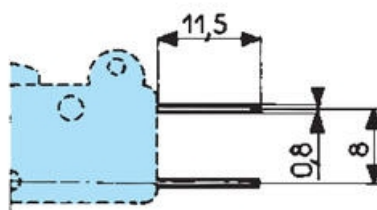

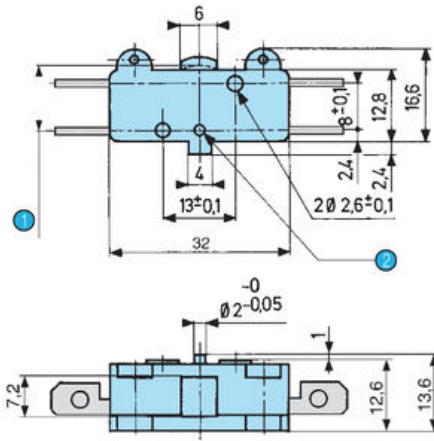


1 OL = 10.65


2 $\varnothing 2^{+0.01 +0.65}$ depth 1.2

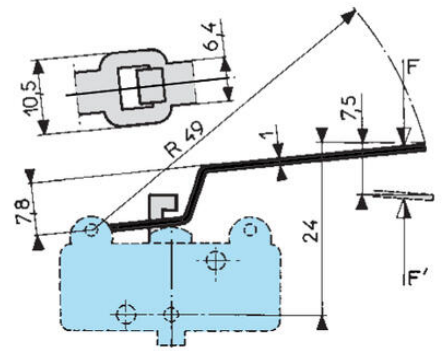


W1 screw

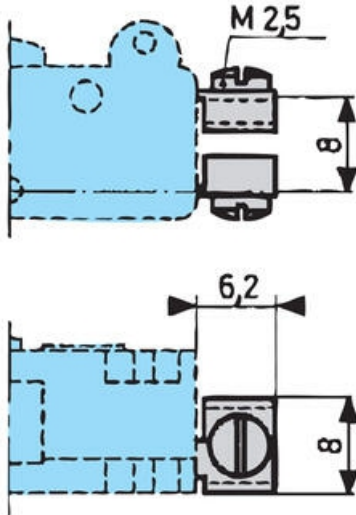


W2 solder

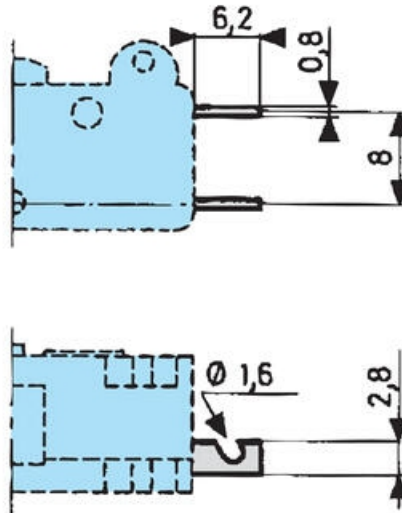


O2 2-pole side mounting plate

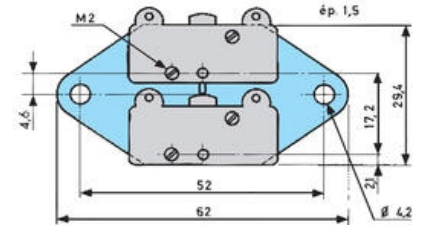


K2 (on request) 2-pole vertical mounting plate

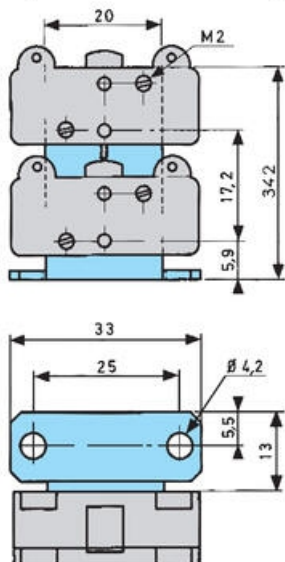

Y (on request) side plate



H Horizontal single pole mounting plate



Without indication, the thickness of the plate is 1.5 mm

