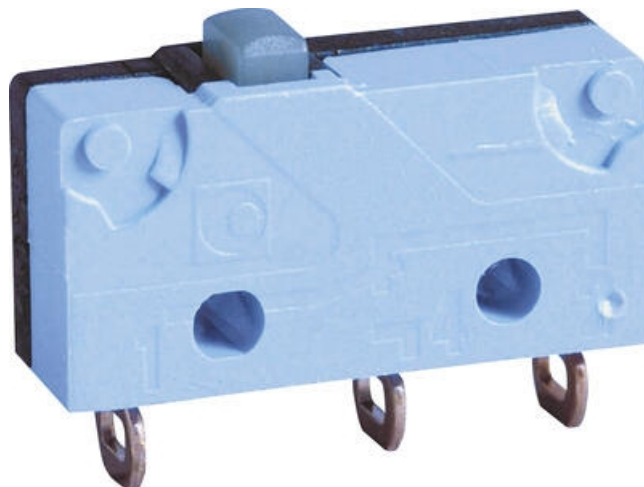



**V4****Mikrokapcsoló**

83170902
831709 ÁTK., W2


- Terhelés 0.1-10A, 250 V/AC
- Minimum terhelés 1 mA 4V/DC
- Elérhető szivacsos ravasszal
- Vezérlő kar két helyzetben rögzíthető

**TERMÉKLEÍRÁS****MŰSZAKI ADATOK**


A visszatérő mozgás min. ereje	0,1 N
Csatlakozás	W2
Érintkezés típusa	Váltókapcsoló
IP-osztály	IP40
Kapcsolópont	8,4 ±0,3 mm
Max. feszültség, AC	250 V
Max. hiszterézis	0,15 mm
Max. készenlét	9,2 mm
Max. működési erő	0,6 N
Max. üzemi hőmérséklet	125 °C
Max. üzemi összteljesítmény	1 N
Megengedett max. túlfeszültség	10 N
Min. feszültség	4 V
Min. teljesítmény	0,001 A
Min. túlszabályozás	0,5 mm
Min. üzemi hőmérséklet	-40 °C
Névleges áramerősség, 250 V AC	5 A
Nyitási távolság	0,4 mm

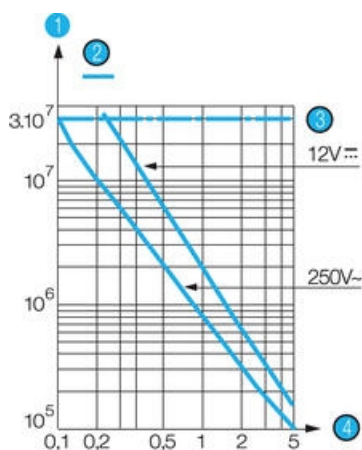

- 1 Number of cycles
- 2 Resistive load
- 3 Mechanical life
- 4 Current (A)

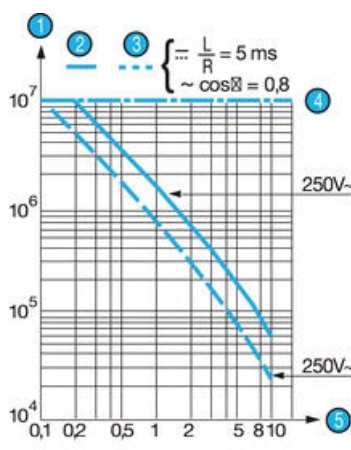

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

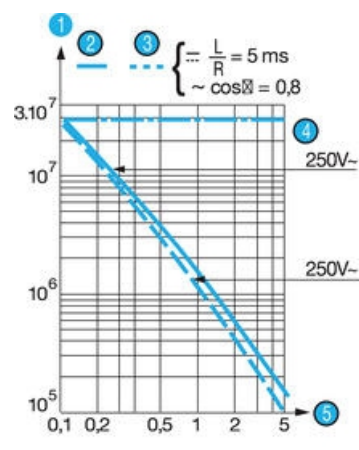

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially




Breaking



Conclusion




W2

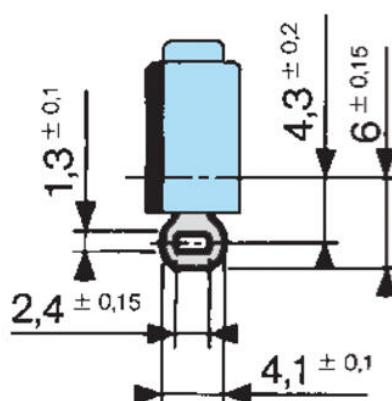



83 170

Asymmetric version

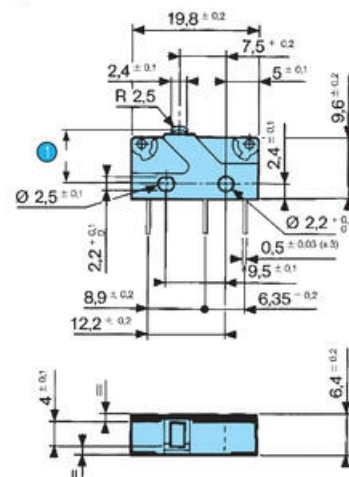


1 OL = 7.6



Mounted with M2 screws
Recommended tightening torque: 2 cm daN

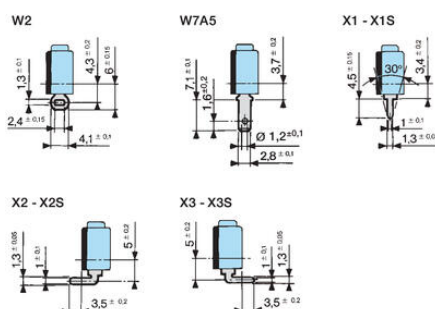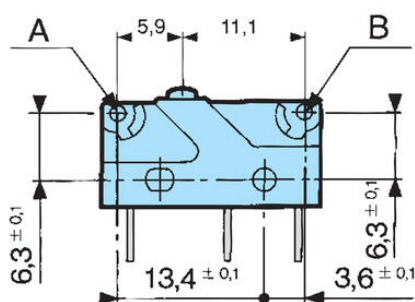

83 170 Symmetrical version


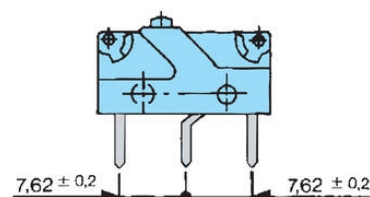


170 E
Arm with roll

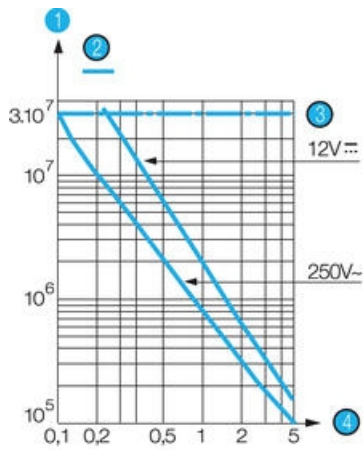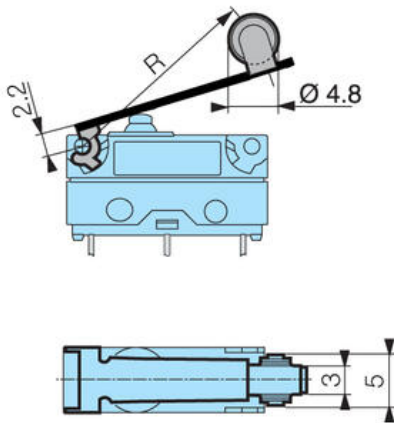



- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

170 A
Straight-arm

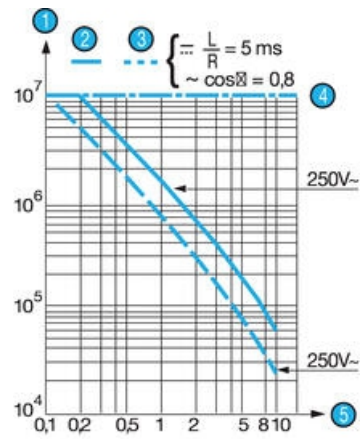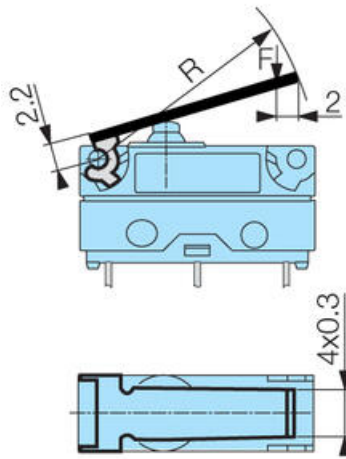

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

170 F
Arm with simulated scroll

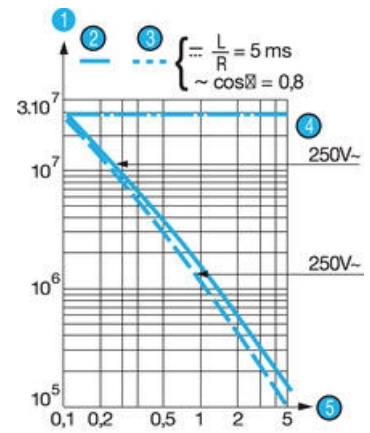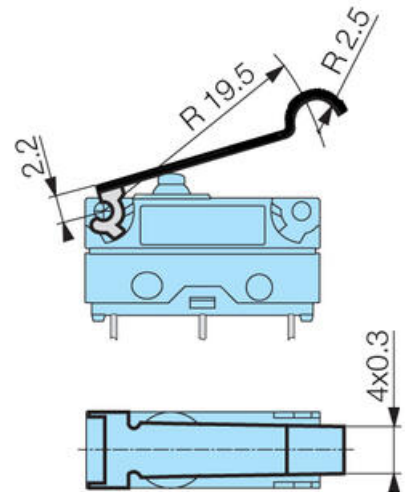

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially




Breaking



Conclusion




83 170
Asymmetric version

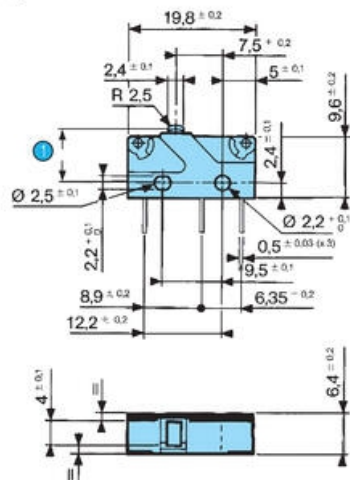


1 OL = 7.6


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

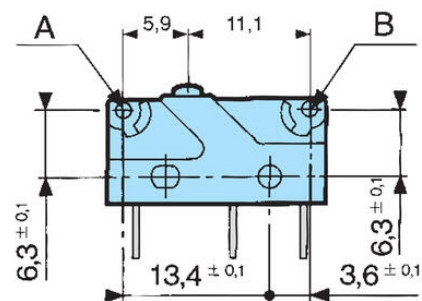


W2




W7A5




X1 - X1S




83 170 Symmetrical version

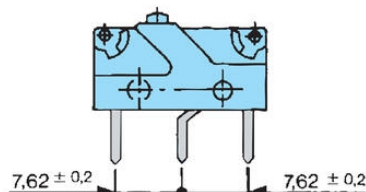



X2 - X2S




X3 - X3S



170 E
Arm with roll

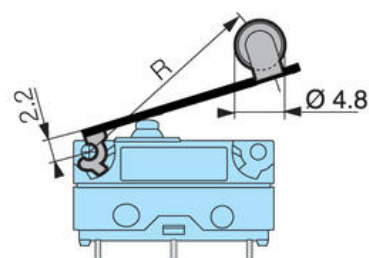

170 A
Straight-arm

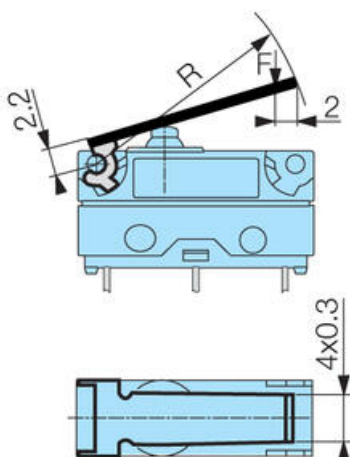

170 F
Arm with simulated scroll

