



VEZÉRLŐEGYSÉGEK


Vezérlőegység C200

ISC-B01

Profisafe, Ethernet, digitális I/O





- Az érzékelési tartomány dinamikusan változtatható valós időben módosítható.
- A rendszer érzékenysége, a figyelmeztetési tartomány és a bemenetek dinamikusan konfigurálhatók.
- Támogatja a ProfiSafe rendszert



TERMÉKLEÍRÁS

MŰSZAKI ADATOK



Felszerelés	DIN sín
Felvett teljesítmény	5 W
Hőmérséklet-tartomány rögzített használata ettől:	-30 °C
IP-osztály	IP20
MTTFd	38
PL	d Category 3
Safety category	3
SIL	2
Szélesség	105 mm

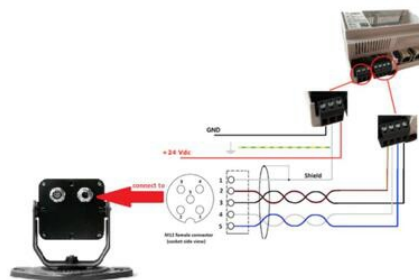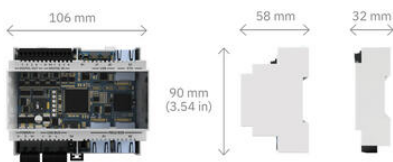

Control unit firmware version	Inspect Safety version				
	2.5.x	2.6.x	2.7.x	2.8.x	2.9.x
1.5.0	OK	OK	NO	NO	NO
1.6.0	NO	OK	OK	OK	NO
2.0.0	NO	NO	OK	OK	OK
2.0.1	NO	NO	NO	NO	OK
2.1.0	NO	NO	NO	OK*	OK*
2.1.1	NO	NO	NO	NO	OK*

Note*: If there is at least one S202A sensor in the system, please use Inspect Safety Studio application.

Control unit firmware version	Inspect Safety Studio version
	1.x.y
2.1.0	OK
2.1.1	OK

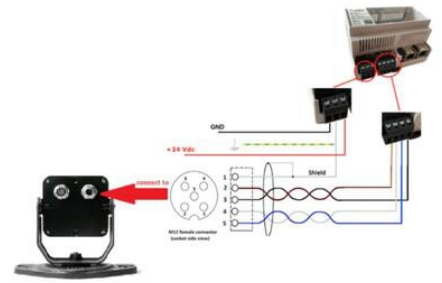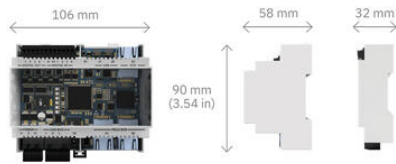

Control unit firmware version	Inspect Safety version				
	2.5.x	2.6.x	2.7.x	2.8.x	2.9.x
1.5.0	OK	OK	NO	NO	NO
1.6.0	NO	OK	OK	OK	NO
2.0.0	NO	NO	OK	OK	OK
2.0.1	NO	NO	NO	NO	OK
2.1.0	NO	NO	NO	OK*	OK*
2.1.1	NO	NO	NO	NO	OK*

Note*: If there is at least one S202A sensor in the system, please use Inspect Safety Studio application.

Control unit firmware version	Inspect Safety Studio version
2.1.0	1.x.y
2.1.1	OK