VEZÉRLŐEGYSÉGEK

Vezérlőegység C200

ISC-B01
Profisafe, Ethernet, digitális I/O



- Az érzékelési tartomány dinamikusan változtatható valós időben módosítható.
- A rendszer érzékenysége, a figyelmeztetési tartomány és a bemenetek dinamikusan konfigurálhatók.
- Támogatja a ProfiSafe rendszert

TERMÉKLEÍRÁS

MŰSZAKI ADATOK

Felszerelés	DIN sín
Felvett teljesítmény	5 W
Hőmérséklet-tartomány rögzített használata ettől:	-30 °C
IP-osztály	IP20
MTTFd	38
PL	d Categori 3
Safety category	3
SIL	2
Szélesség	105 mm

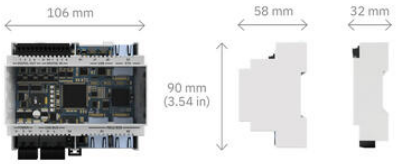

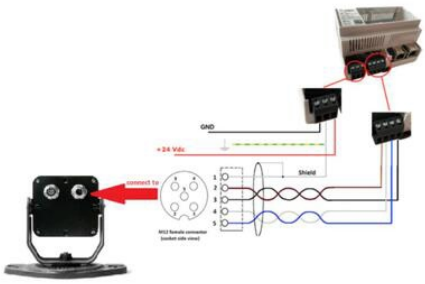

	Inxpect Safety version				
Control unit firmware version	2.5.x	2.6.x	2.7.x	2.8.x	2.9.x
1.5.0	OK	OK	NO	NO	NO
1.6.0	NO	OK	OK	OK	NO
2.0.0	NO	NO	OK	OK	OK
2.0.1	NO	NO	NO	NO	OK
2.1.0	NO	NO	NO	OK*	OK*
2.1.1	NO	NO	NO	NO	OK*

Note: if there is at least one S202A sensor in the system, please use Inxpect Safety Studio application.*

	Inxpect Safety Studio version
Control unit firmware version	1.x.y
2.1.0	OK
2.1.1	OK

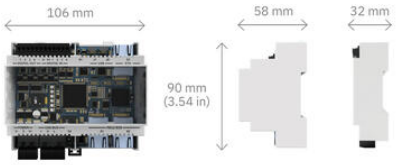

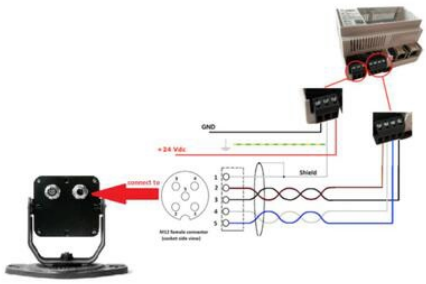

	Inxpect Safety version				
Control unit firmware version	2.5.x	2.6.x	2.7.x	2.8.x	2.9.x
1.5.0	OK	OK	NO	NO	NO
1.6.0	NO	OK	OK	OK	NO
2.0.0	NO	NO	OK	OK	OK
2.0.1	NO	NO	NO	NO	OK
2.1.0	NO	NO	NO	OK*	OK*
2.1.1	NO	NO	NO	NO	OK*

Note*: *If there is at least one S202A sensor in the system, please use Inxpect Safety Studio application.*

	Inxpect Safety Studio version
Control unit firmware version	1.x.y
2.1.0	OK
2.1.1	OK