



HCW4 - NEM ÉRINTKEZŐ INKREMENTÁLIS ÉRZÉKELŐ

HCW4PG590256G3

- Felbontás max. 1024 P / K
- A, B és Z csatornák és ugyanaz invertálva
- IP67, opcionális IP69K
- 2m kábellel



TERMÉKLEÍRÁS

MŰSZAKI ADATOK

Befoglalási átmérő	50 mm
Csatlakozás	Kábel
Érzékelő típusa	Differenciális
Felbontás	256 P/R
IP-osztály	IP67
Kilépés	Push/Pull
Max. tápfeszültség, DC	30 V DC
Max. üzemi hőmérséklet	85 °C
Min. tápfeszültség, DC	5 V DC
Min. üzemi hőmérséklet	-40 °C


STANDARD CONNECTION										
		-	+	A	B	0	A/	B/	Q/	Ground
G3	PVC cable 8 wires 8230550	WH white	BN brown	GN green	YE yellow	GY grey	PK pink	BU blue	RD red	Main shield
GP	PUR cable 12 wires 8230550	WH white + WHVCH white/green	BU blue + BNVCH brown/green	GY grey	BN brown	RD red	PK pink	GN green	BK black	General shielding

ORDERING REFERENCE (Contact the factory for special versions - see stainless steel version, connections...)

	Mechanics	Supply Output stage	Signals	Resolution	Connection	Connection orientation
HCW4:	00:	ZG2: 5Vdc; TL / RS422 output	Y: A, A/; B, B/; 0, Q/	1024:	G3: PVC cable 8 wires	R020: Radial cable 2m
Incremental encoder	Modular	PG5: 5 to 30Vdc; Push-pull output (TL / RS422 available if encoder supply is 5Vdc)		max	GP: PUR cable 12 wires	

Ex: HCW4 00 // PG5 Y // 01024 // G3 R020

AVAILABLE RESOLUTIONS
32 64 128 256 1024

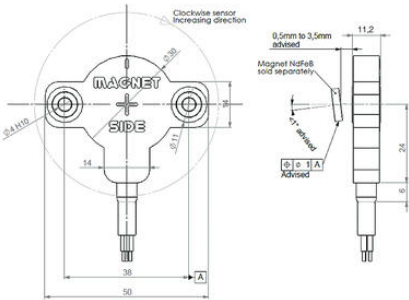

STANDARD CONNECTION										
		-	+	A	B	0	A/	B/	Q/	Ground
G3	PVC cable 8 wires 8230550	WH white	BN brown	GN green	YE yellow	GY grey	PK pink	BU blue	RD red	Main shield
GP	PUR cable 12 wires 8230550	WH white + WHVCH white/green	BU blue + BNVCH brown/green	GY grey	BN brown	RD red	PK pink	GN green	BK black	General shielding

ORDERING REFERENCE (Contact the factory for special versions - see stainless steel version, connections...)

	Mechanics	Supply Output stage	Signals	Resolution	Connection	Connection orientation
HCW4:	00:	ZG2: 5Vdc; TL / RS422 output	Y: A, A/; B, B/; 0, Q/	1024:	G3: PVC cable 8 wires	R020: Radial cable 2m
Incremental encoder	Modular	PG5: 5 to 30Vdc; Push-pull output (TL / RS422 available if encoder supply is 5Vdc)		max	GP: PUR cable 12 wires	

Ex: HCW4 00 // PG5 Y // 01024 // G3 R020

AVAILABLE RESOLUTIONS
32 64 128 256 1024