



TCW4 - NEM ÉRINTKEZŐ ANALÓG ÉRZÉKELŐ

TCW4-ANALOGIA

- Robosztus konstrukció nagy rezgés- és ütésállósággal
- 0-10 V, 0,5-4,5V, 4-20 mA
- IP67, opcionális IP69K
- 2m kábellel




TERMÉKLEÍRÁS

MŰSZAKI ADATOK

Befoglalási átmérő	52 mm
Csatlakozás	Kábel
Érzékelő típusa	Abszolút
IP-osztály	IP67
Kilépés	0,5-4,5 V, 0-10 V, 4-20 mA
Max. tápfeszültség, DC	30 V DC
Max. üzemi hőmérséklet	85 °C
Min. tápfeszültség, DC	5 V DC
Min. üzemi hőmérséklet	-40 °C
Verzió	Többmenetes

CONNECTION						
	+Vcc	0V	Analog output	RA2 - Reset	Direction	Ground
LS	Brown BN	White WH	Green GN	Blue BU	Red RD	General shielding

ORDERING REFERENCE (Contact the factory for special versions, ex.: stainless steel version, connections...)						
	Mechanics	Supply Output stage	Direction	Resolution	Connection	Connection orientation
TCW4:	00: Absolute multi-turn encoder	311: 15 to 30VDC, 0.10V output 312: 10 to 30VDC, 0.3-4.5V output 313: 15 to 30VDC, 4-20mA output 314: 15 to 30VDC, 0.20mA output 218: 5V +/- 5% Ratio 10...95% voltage supply	3: Analog output with Direction input	xxxx: Calibrated angles in degree Ex: 03400 3x0°	LS: coiled output	R020: Racked Cable 2m
Ex: TCW4_	00 //	311	3 //	03400 //	LS	R020

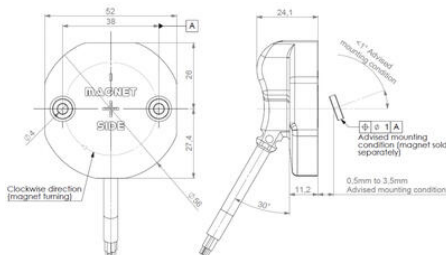

CONNECTION						
	+Vcc	0V	Analog output	RA2 - Reset	Direction	Ground
LS	Brown BN	White WH	Green GN	Blue BU	Red RD	General shielding

ORDERING REFERENCE (Contact the factory for special versions, ex.: stainless steel version, connections...)						
	Mechanics	Supply Output stage	Direction	Resolution	Connection	Connection orientation
TCW4:	00: Absolute multi-turn encoder	311: 15 to 30VDC, 0.10V output 312: 10 to 30VDC, 0.3-4.5V output 313: 15 to 30VDC, 4-20mA output 314: 15 to 30VDC, 0.20mA output 218: 5V +/- 5% Ratio 10...95% voltage supply	3: Analog output with Direction input	xxxx: Calibrated angles in degree Ex: 03400 3x0°	LS: coiled output	R020: Racked Cable 2m
Ex: TCW4_	00 //	311	3 //	03400 //	LS	R020

