



# TCW4 - NEM ÉRINTKEZŐ SSI ABSZOLÚT KÓDOLO

TCW4-SSI

- 12 bit a felbontáshoz és 16 bites a fordulathoz
- Robusztus konstrukció nagy rezgés- és ütésállósággal
- IP67, opcionális IP69K




## TERMÉKLEÍRÁS

## MŰSZAKI ADATOK

Befoglalási átmérő	52 mm
Csatlakozás	Kábel
Érzékelő típusa	Abszolút
IP-osztály	IP67
Kilépés	SSI
Max. tápfeszültség, DC	30 V DC
Max. üzemi hőmérséklet	85 °C
Min. tápfeszültség, DC	5 V DC
Min. üzemi hőmérséklet	-40 °C
Verzió	Többmenetes

**STANDARD SSI CONNECTION**


Ref.	Type	+ Vcc	0 V	Ck+	Data+	EAZ	Data-	Ck-	Direction	Ground
SS	SSI cable PUR E200100	BN/GN Brown/Green	WH/GH White/Green	GA Green	GT Gray	BL Blue	PK Pink	BU Brown	WH White	General shielding



**TCW4 ORDERING REFERENCE** (Contact the factory for special versions, e.g. dimensions, connectors...)


TCW4	Mechanics	Supply	Output stage	Code	Resolution	Connection	Orientation
	D0: magnetic modulator	F: 5 to 30Vdc	SS: 30 without parity	E: Binary	12B120E: 25 bits	SS: 30cm PUR cable	R001: 30cm radial cable
				G: Gray	12B120G: 24 bits		

Ex. TCW4 D0 // F SS G // 12B120E // SS R001

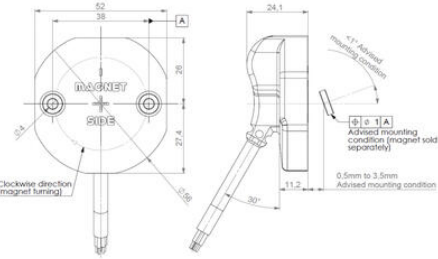

**STANDARD SSI CONNECTION**

Ref.	Type	+ Vcc	0 V	Ck+	Data+	EAZ	Data-	Ck-	Direction	Ground
SS	SSI cable PUR E200100	BN/GN Brown/Green	WH/GH White/Green	GA Green	GT Gray	BL Blue	PK Pink	BU Brown	WH White	General shielding



**TCW4 ORDERING REFERENCE** (Contact the factory for special versions, e.g. dimensions, connectors...)

TCW4	Mechanics	Supply	Output stage	Code	Resolution	Connection	Orientation
	D0: magnetic modulator	F: 5 to 30Vdc	SS: 30 without parity	E: Binary	12B120E: 25 bits	SS: 30cm PUR cable	R001: 30cm radial cable
				G: Gray	12B120G: 24 bits		

Ex. TCW4 D0 // F SS G // 12B120E // SS R001

