



TCW4 - NEM ÉRINTKEZŐ SSI ABSZOLÚT KÓDOLO

TCW4-SSI

- 12 bit a felbontáshoz és 16 bites a fordulathoz
- Robusztus konstrukció nagy rezgés- és ütésállósággal
- IP67, opcionális IP69K



TERMÉKLEÍRÁS


MŰSZAKI ADATOK

Befoglalási átmérő	52 mm
Csatlakozás	Kábel
Érzékelő típusa	Abszolút
IP-osztály	IP67
Kilépés	SSI
Max. tápfeszültség, DC	30 V DC
Max. üzemi hőmérséklet	85 °C
Min. tápfeszültség, DC	5 V DC
Min. üzemi hőmérséklet	-40 °C
Verzió	Többmenetes

STANDARD SSI CONNECTION

Ref.	Type	+Vcc	0 V	Clk+	Data+	RAZ	Data-	Clk-	Direction	Ground
SS	SSI cable PUR (S30030)	BN/GN Brown/Green	WH/GN White/Green	GN Green	GY Gray	BU Blue	PK Pink	BN Brown	WH White	General shielding

DIRECTION input



RAZ / RAZ input



Note: Do not connect other pinouts, connect DIRECTION and RAZ to a potential (RAZ or DV if not used).


Level '0' min 0 V max 0.7V(+Vcc) direction - Stalk

Level '1' min 4.5 V max 5.0V(+Vcc) direction + Stalk

TCW4 ORDERING REFERENCE (Contact the factory for special versions, ex. dimensions, connections...)

TCW4:	Mechanics	Supply	Output stage	Code	Resolution	Connection	Orientation
00:	modular	5 to 30Vdc	SSI without parity	128130E:	25 bits	SSI PUR cable	SS: 50cm radial cable
P:				128120E:	24 bits	Gray	R005:
SS:							
E:							
G:							
128130E:							
SS:							
R005:							


Ex: TCW4 00 // P SS G // 128130E // SS R005

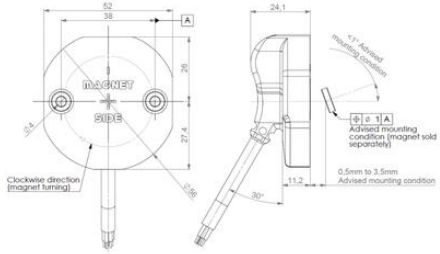

STANDARD SSI CONNECTION

Ref.	Type	+Vcc	0 V	Clk+	Data+	RAZ	Data-	Clk-	Direction	Ground
SS	SSI cable PUR (S30030)	BN/GN Brown/Green	WH/GN White/Green	GN Green	GY Gray	BU Blue	PK Pink	BN Brown	WH White	General shielding

DIRECTION input



RAZ / RAZ input



Note: Do not connect other pinouts, connect DIRECTION and RAZ to a potential (RAZ or DV if not used).

Level '0' min 0 V max 0.7V(+Vcc) direction - Stalk

Level '1' min 4.5 V max 5.0V(+Vcc) direction + Stalk

TCW4 ORDERING REFERENCE (Contact the factory for special versions, ex. dimensions, connections...)

TCW4:	Mechanics	Supply	Output stage	Code	Resolution	Connection	Orientation
00:	modular	5 to 30Vdc	SSI without parity	128130E:	25 bits	SSI PUR cable	SS: 50cm radial cable
P:				128120E:	24 bits	Gray	R005:
SS:							
E:							
G:							
128130E:							
SS:							
R005:							

Ex: TCW4 00 // P SS G // 128130E // SS R005

