



SINGLE-ROD TYPE CYLINDER Ø 20-25



SINGLE-ROD TYPE CYLINDER Ø 32-100
Two cylinder

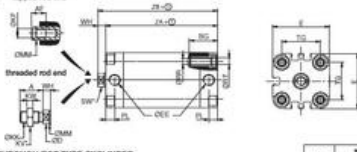

THROUGH-ROD TYPE CYLINDER
flare cylinder



Q	weights	
	(T)	(R)
20	0.120	0.0008
25	0.15	0.003
30	0.208	0.0009
40	0.240	0.0033
50	0.421	0.0048
60	0.552	0.0051
80	0.881	0.0078
100	1.018	0.0085

(2) Calculated weights at 0.001.

0	A	AF	BG	CG	E	EE	ENF	ENK	KV	KN	MM	PL	DSR	DRT	SW	TG	WH	ZA	ZB
20	18	17	23.5	11.8	36	M	M16x128	16	8	12	7.5	5.1	M8	8	32	8	27	43	
25	18	10	15	8.5	43	M	M16x128	12	4	10	10	4.2	M8	8	32	8	29	43	
30	18	17	23.5	11.8	46	G	M16x128	16	8	12	7.5	5.1	M8	10	32.5	7	44	35	
40	18	17	23.5	11.8	54	G	M16x128	16	8	12	7.5	5.1	M8	12	36	7	43	52	
50	22	18	24	15.8	68	G	M16x128	16	8	12	7.5	5.2	M8	13	44.5	8	49	53	
60	22	18	24	15.8	75	G	M16x128	16	8	12	7.5	5.2	M8	16	49	8	49	53	
80	28	20	28.5	18.8	96	G	M16x128	16	8	12	7.5	5.4	M10	16	70	10	54	56	
100	28	20	28.5	18.8	115	G	M16x128	16	8	12	7.5	5.4	M10	21	80	10	57	74	