



LED VILLOGÓ FÉNYJELZŐ/HANGJELZŐ, CS1

C111621005

LED-es akusztikus riasztó, Piros ház, Borostyán, 24 V DC, CS1

- Független vagy vízszintes rögzítés, költséghatékony fényjelző hangjelzővel
- 86-106 dB tartomány
- Villogó fényjelző 32 tónussal
- IP65




TERMÉKLEÍRÁS

A CS1 egy LED-lámpás villogóval felszerelt gazdaságos kombinált modul. A hangjelzés és a hangszint DIP-kapcsolókkal állítható be, a bel- és kültéri kivitelű készülékek védelme egyaránt IP65 fokozatú. A 32 különböző hangjelzés a legtöbb célra – pl. tűzjelzésre – elegendő.

MŰSZAKI ADATOK




Felszerelés	Vízszintes, Független
Fényforrás	LED
Hangjelzések száma	32 pc
IP-osztály	IP65
Kábelbemenet	Alul
Lencse színe	Narancs
Light type	Narancsszínű LED
Max. hangfrekvencia	2900 Hz
Max. névleges áramerősség	0,041 A
Max. tápfeszültség, AC/DC	35 V
Max. üzemi hőmérséklet	70 °C
Max. zajszint	109 dB
Min. hangfrekvencia	440 Hz
Min. névleges áramerősség	0,014 A

Min. tápfeszültség, AC/DC	18 V
Min. üzemi hőmérséklet	-20 °C
Min. zajszint	88 dB
Színes ház	Vörös
Tápfeszültség	24 V
Tömeg	258 g
Villanás frekvencia	1 Hz
Zajszabályozás	Igen

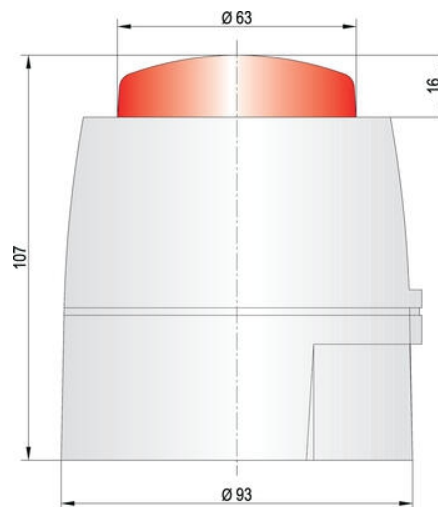

Tontabelle / Tone table

Nr.	Sound	Tone frequency	DP-value	2nd stage alarm test
1	U.S. Sirens	800-1200Hz at 0.5 sec.	11111	800 count
2	Activation with 10 sec. delay	800/900Hz at 2 Hz	11110	800 count
3	Stable Tone 10 sec. delay	800/1000Hz at 0.5 sec.	11101	800 count
4	Overload with 10 sec. delay	1000/1200Hz at 2 Hz	11100	900 count
5	U.S. Back up intermitted tone	2000Hz at 1.5 sec. on/off	11011	2000 count
6	U.S. Back up alarm	800Hz at 100 msec. on/off	11010	800 count
7	U.S. Back up intermitted tone - test	2000Hz at 1.50 sec. on/off	11001	800 count
8	U.S. Continuous tone 1000Hz	800Hz cont.	11000	Some tone
9	Continuous tone 1100	800/900Hz at 2 Hz	10111	800 count
10	Australian siren whoop	Intermittent 970Hz 0.625ms on/0.625ms off	10110	500-5000 0.5 sec. on 0.5 sec. off
11	Dutch sweep tone	970Hz cont.	10101	500-5000 0.5 sec. on 0.5 sec. off
12	Japanese siren tone	800/900Hz at 2 Hz	10100	900 count
13	Swedish tone (2 Hz)	800/900Hz at 2 Hz	10011	800 count
14	Swedish tone (10 sec. delay)	800/900Hz at 2 Hz	10010	200 count
15	French alarm	240-2600Hz at 2 Hz	10001	200 count
16	US Temporal Pattern 1P	2500Hz for 0.5 sec. on 0.5 sec. off	10000	800 count
17	Intermitted tone 10 sec. delay	Intermitted tone 800Hz at 0.5 sec. on/off	01111	800 count
18	ISO 10011 (U.S. 10011) (2 Hz)	Intermitted tone 970Hz 0.625ms on/0.625ms off	01110	Some tone
19	Intermitted tone medium	1000Hz at 0.5 sec. on/off	01101	800 count
20	ISO 10011	Intermitted tone 2124 Hz 100ms on/100ms off	01100	Some tone
21	Continuous tone	1000Hz continuous	01011	Some tone
22	U.S. Back	800/900Hz at 2 Hz	01010	800 count
23	U.S. Continuous	800Hz	01001	200 count
24	Swedish tone (2 Hz)	800/900Hz at 2 Hz	01000	800 count
25	German Siren tone	Intermittent 1000/1200Hz at 2 Hz	00111	800 count
26	Swedish tone (10 sec. delay)	Intermitted tone 660Hz 100 ms on / 100 ms off	00110	Some tone
27	French tone 20 sec. delay	Intermitted tone 800Hz at 0.5 sec. on/off	00100	800 count
28	Intermitted tone (10 sec. delay)	Intermitted tone 800Hz at 0.5 sec. on/off	00101	800 count
29	US Temporal Pattern 1P	2000Hz for 0.5 sec. on 0.5 sec. off	00011	2000 count
30	Screen 2 way ramp 10 sec. delay	600/1200Hz rising then falling @ 20 Hz	00010	800 count
31	U.S. Back 1 - 1 sec. delay	Intermitted tone 800/900Hz at 2 Hz	00001	800 count
32	Screen 2 way ramp 10 sec. delay	600/1200Hz 2 way rising / 2 way falling	00000	800 count

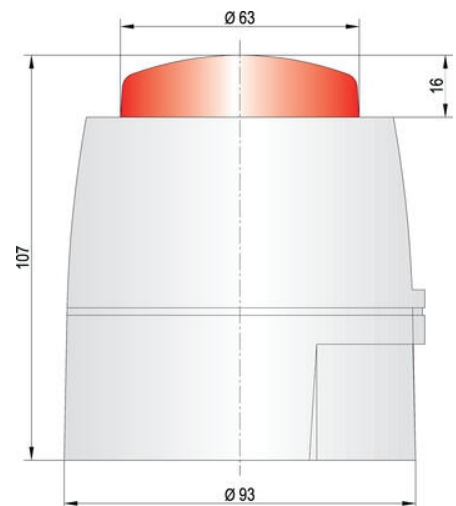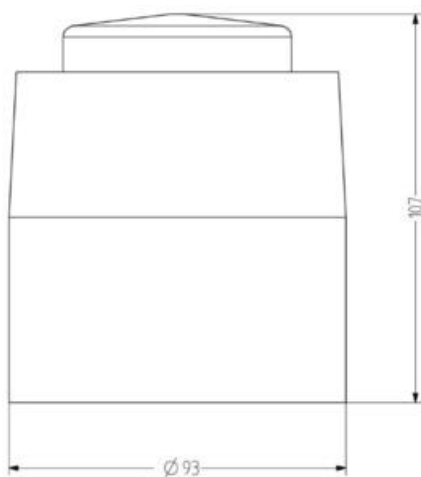

Nr.	Sound	Tone frequency	DR switch	2nd stage alarm (Hz)
1	1-F Buzzer	800 - 1000Hz at 0.5 sec	111111	800 cont
2	Alarm tone (US standard)	300/600Hz at 2Hz	111110	800 cont
3	Alarm tone (EU standard)	500/1000Hz at 0.5 sec	111101	800 cont
4	Alarm tone (US standard)	300/600Hz at 2Hz	111100	800 cont
5	1-F Buzzer at interrupted tone	800Hz at 1.0 sec on/off	11011	800 cont
6	1-F Buzzer at 100ms	800Hz at 100 msec on/off	11010	800 cont
7	1-F Buzzer at interrupted tone - fast	800Hz at 1.0 sec on/off	11001	800 cont
8	1-F Continuous tone (US/EP)	800Hz cont	11000	800 tone
9	Alarm tone (1 Hz)	300/600Hz at 1Hz	10111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.425ms on/0.425ms off	10110	500/1000 3.75 sec on 0.425 sec off
11	Dutch sweep tone	970Hz cont	10101	0.5 sec on 0.5 sec off
12	Archiepope alarm tone	300/600Hz at 2Hz	10100	800 cont
13	Buzzer tone (2 Hz)	600/1200Hz at 2Hz	10011	800 cont
14	Alarm tone (1-F slow pulse)	600/1200Hz at 2Hz	10010	800 cont
15	1-F 1-F alarm	600/1200Hz at 2Hz	10001	800 cont
16	US Temporal Pattern 1-F	1200Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	10000	800 cont
17	Interrupted tone (US standard)	Interrupted tone 800Hz at 0.5 sec on/off	01111	800 cont
18	ISO 8001 IF (ISO 8001 Pt 1 99)	Intermittent 970Hz 500ms on/500ms off	01110	800 tone
19	Intermittent tone (medium)	1000Hz at 1.0 sec on/off	01101	800 cont
20	ISO 8001 IF	Intermittent 1000Hz 500ms on/500ms off	01100	800 tone
21	Continuous tone	1000Hz continuous	01011	800 tone
22	1-F Buzzer	800/1600Hz on/off at 110Hz	01010	800 cont
23	1-F Continuous	800Hz	01001	800 cont
24	Buzzer tone (2 Hz)	600/1200Hz at 2Hz	01000	800 cont
25	German 1-F tone	800Hz/1200Hz at 1Hz	00111	800 cont
26	Swedish 1-F tone	Intermittent 650Hz 150 ms on / 500 ms off	00110	800 tone
27	French tone at 90	1000Hz for 100 ms and within 1000ms	00100	800 cont
28	Swedish 1-F short signal	Continuous 800Hz	00100	800 tone
29	US Temporal Pattern 1-F	1200Hz for 0.5 sec on 0.5 sec off off for 1.5 sec then repeat	00011	800 cont
30	Alarm 2-stage alarm 1-F short	500/1000Hz rising then falling 0.25 sec	00010	800 cont
31	1-F 1000 Hz 1-F tone	Intermittent tone 800/1000 Hz 1 Hz	00000	800 cont
32	Alarm 2-stage alarm 1-F long	500/1000Hz 3 sec rising / 3 sec falling	00000	800 cont

