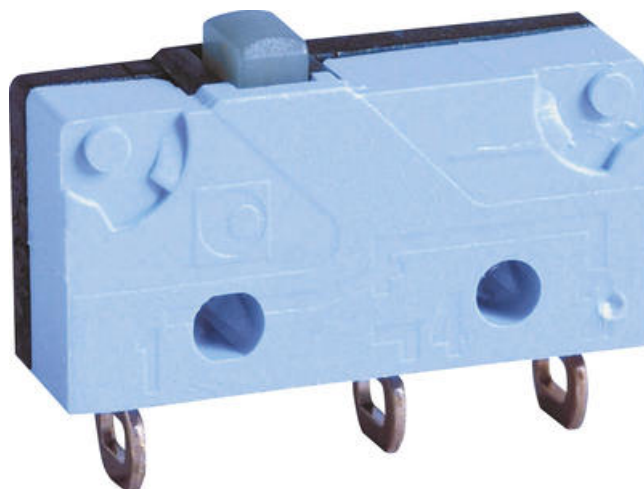


**V4****Mikrokapcsoló**



83170902
831709 ÁTK., W2

- Terhelés 0.1-10A, 250 V/AC
- Minimum terhelés 1 mA 4V/DC
- Elérhető szivacsos ravasszal
- Vezérlő kar két helyzetben rögzíthető


**TERMÉKLEÍRÁS****MŰSZAKI ADATOK**

A visszatérő mozgás min. ereje	0,1 N
Csatlakozás	W2
Érintkezés típusa	Váltókapcsoló
IP-osztály	IP40
Kapcsolópont	8,4 ±0,3 mm
Max. feszültség, AC	250 V
Max. hiszterézis	0,15 mm
Max. készenlét	9,2 mm
Max. működési erő	0,6 N
Max. üzemi hőmérséklet	125 °C
Max. üzemi összteljesítmény	1 N
Megengedett max. túlfeszültség	10 N
Min. feszültség	4 V
Min. teljesítmény	0,001 A
Min. túlszabályozás	0,5 mm
Min. üzemi hőmérséklet	-40 °C
Névleges áramerősség, 250 V AC	5 A
Nyitási távolság	0,4 mm


W2

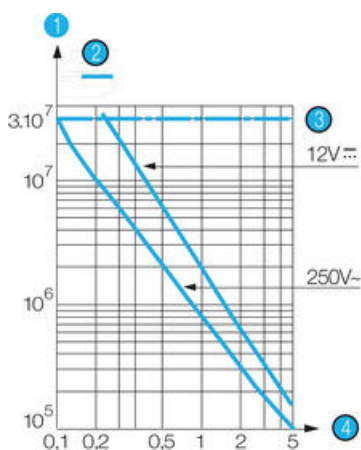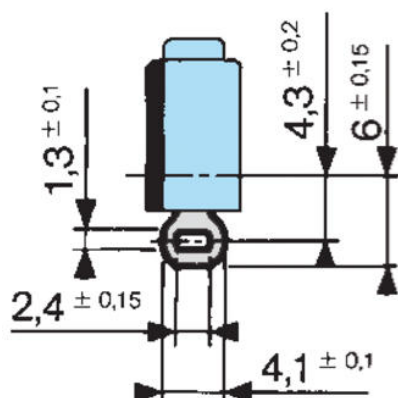

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

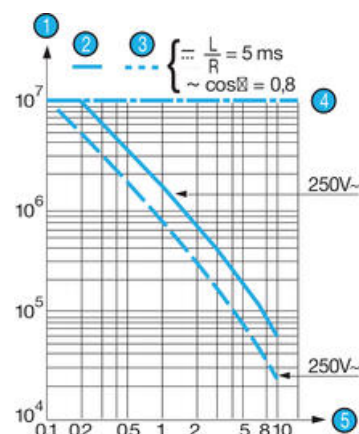

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

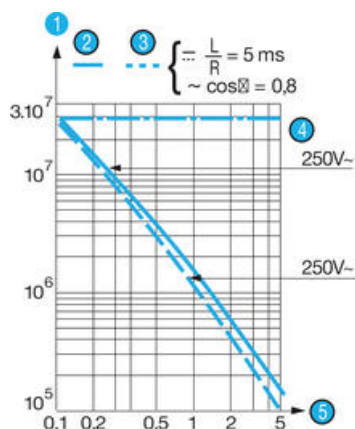

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially



Breaking




Conclusion









83 170

Asymmetric version

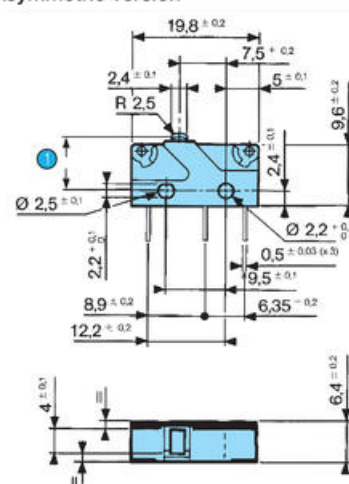


1 OL = 7,6


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

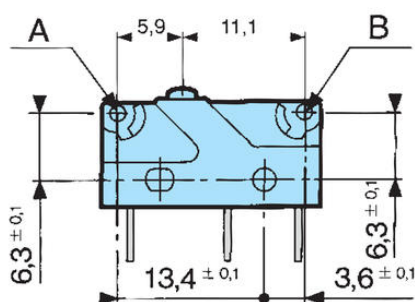


83 170 Symmetrical version

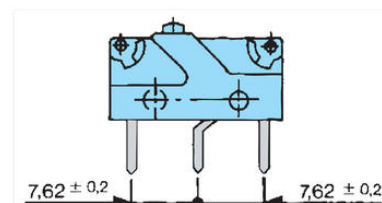

170 E
Arm with roll

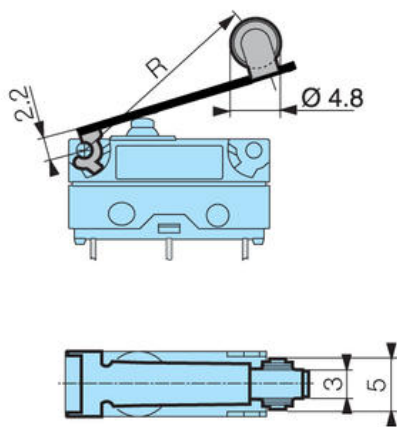

170 A
Straight-arm

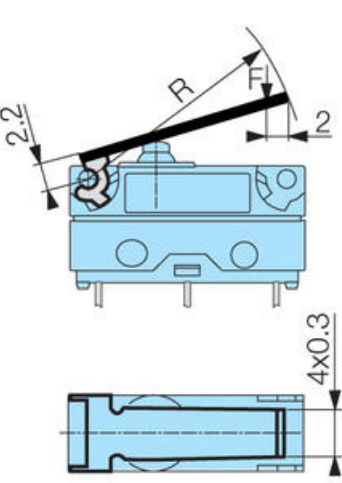

170 F
Arm with simulated scroll

