
PIEZOELEKTROMOS ZÚGÓK

716149
SUS-6149 / FK DC 24V

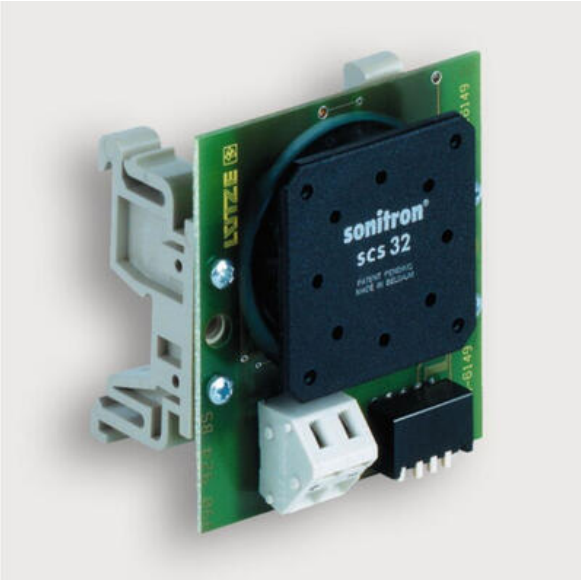



- 24 VDC tápegység
- Névleges áram 0,03 / 0,018 A
- Hangerősség 85/92 dB
- DIN sínre vagy csavaros rögzítés


TERMÉKLEÍRÁS

MŰSZAKI ADATOK


2437_Frequency bandwidth (Hz)	200–4000
4526_Temperature range (°C)	-40…+70 (+85 10 min.)
5219_Sound pressure (dB)	92
Connection type	Rugós szorító
Felszerelés	DIN sín
Input voltage range	10–30 V DC
Jóváhagyások	EN 45545-2:2013+A1:2015, EN 50121-3-2:2016, EN 50155:2017, EN 50124-1:2017, EN 61373:2010
Méretek	50×55×37 mm
Névleges áramerősség	0,03 A
Supply voltage	24 V DC
Tömeg	0,028 kg







switch 1 position	switch 2 position	switch 3 position	switch 4 position	frequency
OFF	OFF	OFF	OFF	200Hz
ON	OFF	OFF	OFF	260Hz
OFF	ON	OFF	OFF	300Hz
ON	ON	OFF	OFF	350Hz
OFF	OFF	ON	OFF	400Hz
ON	OFF	ON	OFF	450Hz
OFF	ON	ON	OFF	500Hz
ON	ON	ON	OFF	550Hz



switch 1 position	switch 2 position	switch 3 position	switch 4 position	frequency
OFF	OFF	OFF	ON	600Hz
ON	OFF	OFF	ON	650Hz
OFF	ON	OFF	ON	700Hz
ON	ON	OFF	ON	800Hz
OFF	OFF	ON	ON	2500Hz
ON	OFF	ON	ON	3000Hz
OFF	ON	ON	ON	3600Hz
ON	ON	ON	ON	4000Hz